


no longer available - archive entry Alternative article: OGT200 or OGT500
 When selecting an alternative article and accessories please note that technical data may differ!

efector200
 OG5050



OGT-FPKG/US-100

Photoelectric sensors



1: pushbutton



Product characteristics
 Diffuse reflection sensor

Threaded type

M18 x 1

Quick disconnect

Function check output

Range 1...600mm (Range referred to white paper 200 x 200 mm, 90 % remission)

adjustable

Electrical data

Electrical design

Operating voltage [V]

Current consumption [mA]

Type of light

Protection class

Reverse polarity protection

Outputs

Output function

Voltage drop

- Switching output [V]

- Function check output [V]

Current rating

- Switching output [mA]

- Function check output [mA]

Short-circuit protection

Overload protection

Switching frequency [Hz]

Monitoring range

Range [mm]

Light spot diameter [mm]

Excess gain graphs

DC PNP

10...36 DC

< 32

Infrared light 880 nm

II

yes

light-on / dark-on programmable

< 2.5

< 3.5

200

10

yes (non-latching)


yes

500

1...600 (Range referred to white paper 200 x 200 mm, 90 % remission)



< 169 (at maximum range)

OG5050 - Diffuse reflection sensor - eclass: 27270903 / 27-27-09-03

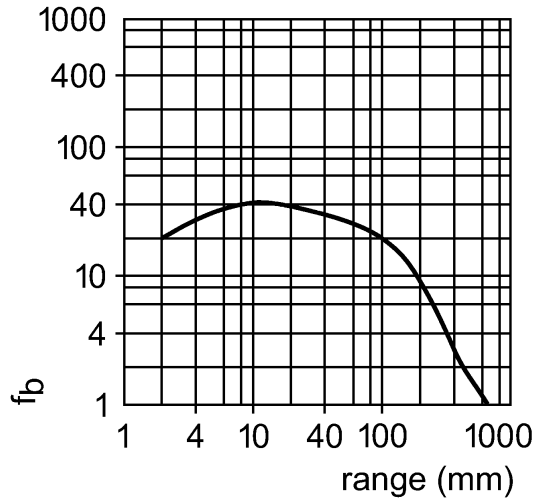

Environment	
Ambient temperature [°C]	-25...80
Protection	IP 67
Tests / approvals	
EMC	EN 60947-5-2
Mechanical data	
Housing materials	PBT (Pocan)
Lens material	PMMA
Weight [kg]	0.044
Displays / operating elements	
Output status indication LED	yellow
Power LED	green
Function display LED	red
Electrical connection	
Connection	M12 connector

Wiring



2: function check

Accessories	
Accessories (included)	2 lock nuts
Remarks	
Pack quantity [piece]	1

ifm efector, inc. • 1100 Atwater Drive • Malvern • PA 19355 — We reserve the right to make technical alterations without prior notice. — US — OG5050 — 06.03.2003

no longer available - archive entry Alternative article: OGT200 or OGT500

When selecting an alternative article and accessories please note that technical data may differ!