

no longer available - archive entry Alternative article: OGE302 or OGE303
 When selecting an alternative article and accessories please note that technical data may differ!


efector200

OG5108



OGE-FPKG/V4A/6M

Photoelectric sensors



1: pushbutton



Product characteristics

Through-beam sensor

Threaded type

M18 x 1

Cable

Receiver

Sensing range 15m

adjustable

Electrical data

Electrical design

DC PNP

Operating voltage [V]

10...36 DC

Current consumption [mA]

< 22

Type of light

Infrared light 880 nm

Protection class

II

Reverse polarity protection

yes

Outputs

Output function

light-on / dark-on programmable

Voltage drop [V]

< 2.5

Current rating

- Current rating (continuous) [mA]

200

- Current rating (peak) [mA]

200

Short-circuit protection

yes (non-latching)

Overload protection

yes

Switching frequency [Hz]

500


Monitoring range

Sensing range [m]

15

Excess gain graphs

OG5108 - Through-beam sensor - eclass: 27270901 / 27-27-09-01

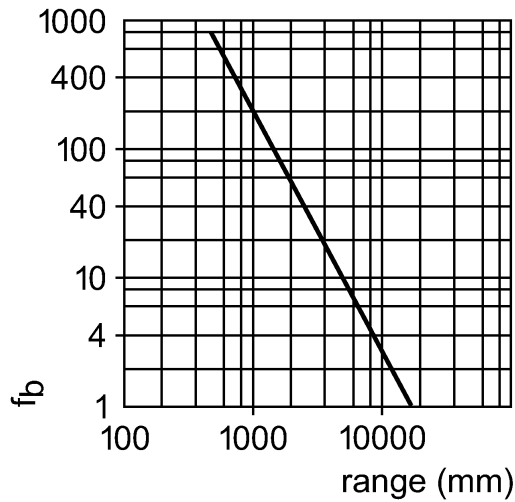

Environment	
Ambient temperature [°C]	-25...80
Protection	IP 68 / IP 69K
Tests / approvals	
EMC	EN 60947-5-2 EN 55011: class B
MTTF [Years]	567
Mechanical data	
Housing materials	stainless steel 316L / 1.4404; PBT
Lens material	PMMA
Weight [kg]	0.282
Displays / operating elements	
Output status indication LED	yellow
Power LED	green
Function display LED	red
Electrical connection	
Connection	PVC cable / 6 m; 3 x 0.34 mm ²

Wiring

Core colors
 BN brown
 BU blue
 BK black



Accessories	
Accessories (included)	2 lock nuts
Remarks	
Pack quantity [piece]	1

ifm efector, inc. • 1100 Atwater Drive • Malvern • PA 19355 — We reserve the right to make technical alterations without prior notice. — US — OG5108 — 06.03.2003
 no longer available - archive entry Alternative article: OGE302 or OGE303

When selecting an alternative article and accessories please note that technical data may differ!