

Product characteristics

Through-beam sensor

Threaded type

M18 x 1

Quick disconnect

Receiver

Sensing range 20m

Electrical data

Electrical design

DC PNP

Operating voltage [V]

10...36 DC

Current consumption [mA]

10

Type of light

red light 624 nm

Protection class

II

Reverse polarity protection

yes

Outputs

Output function

dark-on mode

Voltage drop [V]

< 2.5

Current rating [mA]

200

Short-circuit protection

yes (non-latching)

Overload protection

yes

Switching frequency [Hz]


1000

Monitoring range

Sensing range [m]

20

Excess gain graphs

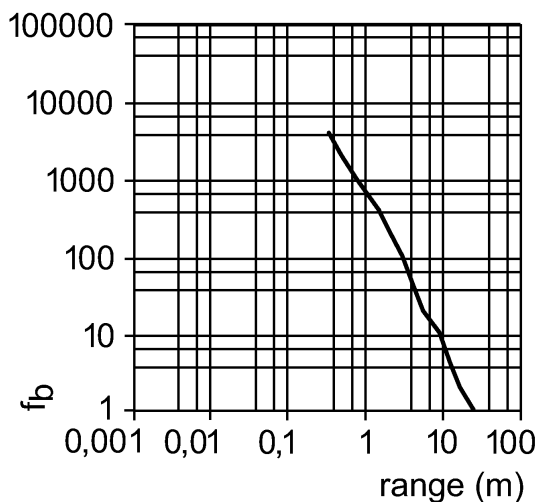

Environment


Ambient temperature [°C]

-25...60

OGE200 - Through-beam sensor - eclass: 27270901 / 27-27-09-01

Protection	IP 67
Tests / approvals	
EMC	EN 60947-5-2
MTTF [Years]	1112
Mechanical data	
Housing materials	housing: stainless steel 316L / 1.4404
Lens material	PMMA
Weight [kg]	0.05
Displays / operating elements	
Output status indication LED	yellow
Electrical connection	
Connection	M12 connector

Wiring



Accessories	
Accessories (included)	2 lock nuts
Remarks	
Remarks	cULus - Class 2 source required
Pack quantity [piece]	1