

1: pushbutton



Product characteristics

Through-beam sensor

Rectangular, plastics

Quick disconnect

Electronic lock

External teach function

Front sensing

Receiver

Sensing range 10m

adjustable

Electrical data

Electrical design

DC NPN

Operating voltage [V]

10...30 DC

Current consumption [mA]

< 12

Type of light

red light 660 nm

Protection class

III

Reverse polarity protection

yes

Outputs

Output function

light-on / dark-on programmable

Voltage drop [V]

< 2.5

Current rating [mA]

200

Short-circuit protection

yes (non-latching)

Overload protection

yes

Switching frequency [Hz]

1200


Monitoring range

Sensing range [m]

10


Excess gain graphs

**OJ5010 - Through-beam sensor - eclass: 27270901 / 27-27-09-01**

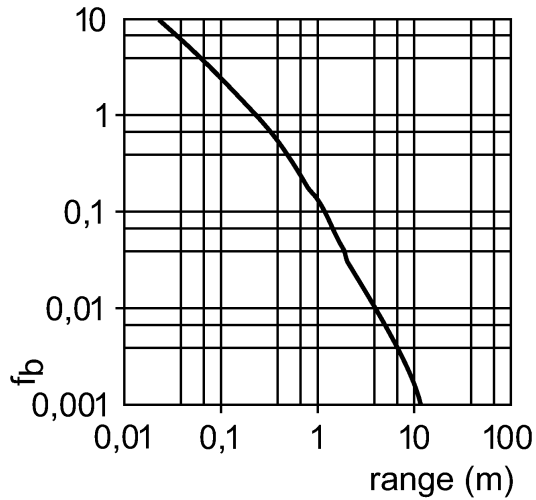

Environment		
Ambient temperature	[°C]	-25...60
Protection		IP 67
Tests / approvals		
EMC		EN 60947-5-2
MTTF	[Years]	1023
Mechanical data		
Housing materials		housing: ABS; fixture: diecast zinc; LED window: SEPS; pushbutton: SEPS
Lens material		glass
Weight	[kg]	0.047
Displays / operating elements		
Output status indication	LED	yellow
Power	LED	green
Function display	LED	red
Electrical connection		
Connection		M8 connector

**Wiring**



Accessories		
Accessories (included)		Basic clip; E20964; 2 mounting screws; M3 x 16; 2 spring washers; 2 nuts
Remarks		
Remarks		cULus - Class 2 source required
Pack quantity	[piece]	1