



OJ5066 - Through-beam sensor - eclass: 27270901 / 27-27-09-01

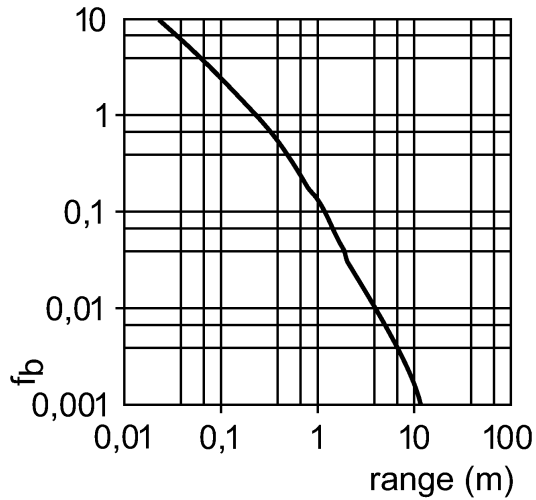

Environment	
Ambient temperature [°C]	-25...60
Protection	IP 67
Tests / approvals	
EMC	EN 60947-5-2
MTTF [Years]	968
Mechanical data	
Housing materials	housing: ABS; fixture: diecast zinc; LED window: SEPS; pushbutton: SEPS; connector body: Hytrel 8068; connector thread: stainless steel 316L / 1.4404
Lens material	glass
Weight [kg]	0.055
Displays / operating elements	
Output status indication LED	yellow
Power LED	green
Function display LED	red
Electrical connection	
Connection	PUR cable / 0.15 m; gold-plated contacts, with M12 connector

Wiring



2: Teach

Accessories	
Accessories (included)	Basic clip; E20964; 2 mounting screws; M3 x 16; 2 spring washers; 2 nuts
Remarks	
Remarks	cULus - Class 2 source required
Pack quantity [piece]	1

ifm efector, inc. • 1100 Atwater Drive • Malvern • PA 19355 — We reserve the right to make technical alterations without prior notice. — US — OJ5066 — 05.05.2010

Alternative article: OJ5109

When selecting an alternative article and accessories please note that technical data may differ!