

1: pushbutton



Product characteristics

Through-beam sensor

Rectangular, plastics

Quick disconnect

Electronic lock

Visible laser light, LASER CLASS 1

External teach function

Side sensing

Receiver

Sensing range 15m

adjustable

Electrical data

Electrical design

DC PNP

Operating voltage [V]

10...30 DC

Current consumption [mA]

< 12

Type of light

red light 650 nm

Life expectancy typ. [h]

50000

Protection class

III

Reverse polarity protection

yes

Outputs

Output function

light-on / dark-on programmable

Voltage drop [V]

< 2.5

Current rating [mA]

200

Short-circuit protection

yes (non-latching)

Overload protection

yes

Switching frequency [Hz]

1200

Monitoring range


Sensing range [m]

15

Smallest detectable object [mm]


Ø 2

Excess gain graphs

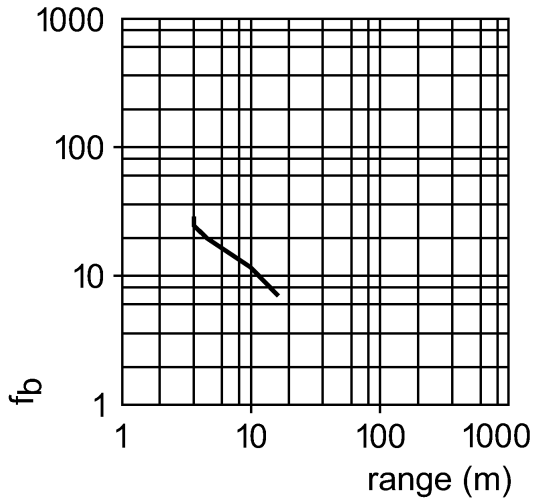

Environment	
Ambient temperature [°C]	-10...60
Protection	IP 67
Tests / approvals	
EMC	EN 60947-5-2
MTTF [Years]	952
Mechanical data	
Housing materials	housing: ABS; LED window: SEPS; pushbutton: SEPS
Lens material	glass
Weight [kg]	0.041
Displays / operating elements	
Output status indication LED	yellow
Power LED	green
Function display LED	red
Electrical connection	
Connection	M8 connector

Wiring



2: Teach

Accessories	
Accessories (included)	2 mounting screws; 2 spring washers; 2 nuts
Remarks	
Remarks	cULus - Class 2 source required
Pack quantity [piece]	1