

1: pushbutton

Receiver in upper lens, transmitter in lower lens



Product characteristics

Diffuse reflection sensor

Rectangular, plastics

Quick disconnect

Electronic lock

Visible laser light, LASER CLASS 1

LASER diffuse reflection sensor

Background suppression

External teach function

Front sensing

Range 15...200mm (Range referred to white paper 200 x 200 mm, 90 % remission)

adjustable

Electrical data

Electrical design

DC PNP

Operating voltage [V]

10...30 DC

Current consumption [mA]

13

Type of light

red light 650 nm

Life expectancy typ. [h]

50000

Protection class

III

Reverse polarity protection

yes

Outputs

Output function

light-on / dark-on programmable

Voltage drop [V]

< 2.5

Current rating [mA]

200

Short-circuit protection

yes (non-latching)

Overload protection

yes

Switching frequency [Hz]

1000

Monitoring range

Range [mm]

15...200 (Range referred to white paper 200 x 200 mm, 90 % remission)


Smallest detectable object [mm]

2


Light spot diameter [mm]

2 x 1 (vertical)

Background suppression chart




- a: sensor
- b: object
- c: background
- x: distance sensor / object
- y: min. distance object / background

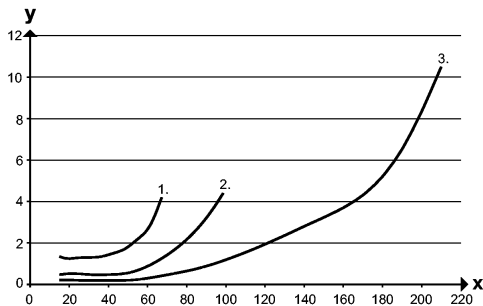

- Values in [mm]
- 1 = object black (6 % remission), background white (90 % remission)
 - 2 = object gray (18 % remission), background white (90 % remission)
 - 3 = object white (90 % remission), background white (90 % remission)

Environment	
Ambient temperature [°C]	-10...60
Protection	IP 67
Tests / approvals	
EMC	EN 60947-5-2
MTTF [Years]	501
Mechanical data	
Housing materials	housing: ABS; LED window: SEPS; pushbutton: SEPS
Lens material	PMMA
Weight [kg]	0.042
Displays / operating elements	
Output status indication LED	yellow
Power LED	green
Electrical connection	
Connection	M8 connector

Wiring



2: Teach

Accessories	
Accessories (included)	2 mounting screws; 2 spring washers; 2 nuts
Remarks	
Remarks	Laser light CLASS 1 LASER PRODUCT IEC 60825-1 : 2007 complies with 21 CFR 1040.10 except for deviations pursuant to Laser Notice No. 50, dated June 2007 cULus - Class 2 source required
Pack quantity [piece]	1

OJ5152 - Diffuse reflection sensor - eclass: 27270904 / 27-27-09-04

ifm efector, inc. • 1100 Atwater Drive • Malvern • PA 19355 — We reserve the right to make technical alterations without prior notice. — US — OJ5152 — 10.10.2011