


OK5001

OKF-FPKG

Photoelectric sensors

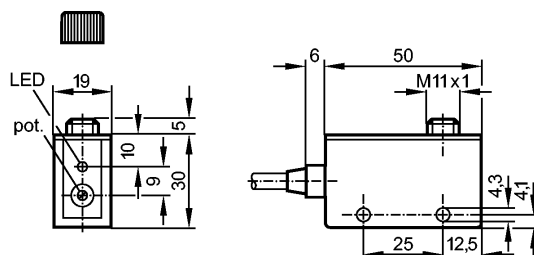

Product characteristics

Fiber-optic amplifier

Rectangular, plastics

Cable

Sensing range 0...120mm (Through-beam sensor)

Range 0...40mm (Diffuse reflection sensor)

adjustable

Electrical data

Electrical design	DC PNP
Operating voltage [V]	10...36 DC
Current consumption [mA]	30 (24 V)
Type of light	red light 660 nm
Protection class	III
Reverse polarity protection	yes

Outputs

Output function	light-on / dark-on programmable
Voltage drop [V]	< 2.5
Current rating [mA]	250
Short-circuit protection	yes (non-latching)
Overload protection	yes
Switching frequency [Hz]	120

Monitoring range

Sensing range [m]	0...0.12 (Through-beam sensor)
Range [mm]	0...40 (Diffuse reflection sensor)

Environment

Ambient temperature [°C]	-25...60
Protection	IP 65

Tests / approvals

EMC	EN 60947-5-2 EN 55011: class B
MTTF [Years]	529

Mechanical data

Housing materials	modified PPO
Weight [kg]	0.152

Displays / operating elements

Output status indication LED	yellow
------------------------------	--------

Electrical connection



OK5001

OKF-FPKG


Photoelectric sensors

Connection	PVC cable / 2 m; 4 x 0.34 mm²
------------	-------------------------------

Wiring

Core colors

- BN brown
- BU blue
- BK black
- WH white

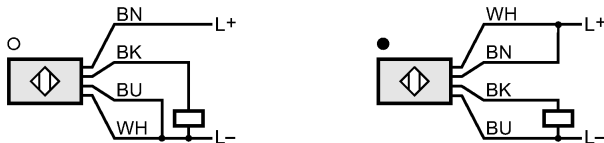

Accessories

Accessories (included)	screwdriver; 2 mounting screws; M4 x 25; 2 washers; 2 spring washers; 2 nuts
------------------------	--

Remarks

Remarks	When through-beam fibre optics are connected light-on mode means the output function "NC" and when diffuse reflection fibre optics are connected the output function "NO". When through-beam fibre optics are connected dark-on mode means the output function "NO" and when diffuse reflection fibre optics are connected the output function "NC"
---------	--

Pack quantity	[piece]	1
---------------	---------	---