

# VITECTOR

## FRABA



### Rubber Profile

OSE-P 25 30 00




#### General Data

Height	30 mm (1.18")
Foot	T Foot Tear-off
Sealing Lip	None
Width	25 mm (0.98")
Foot Width	15.8 mm / 20 mm (tear-off foot)
Material	EPDM
Applicable Bumper	OSE-B 3518
Finger Detection	Yes
Hardness	70 ± 5 Shore A
Operation Temperature	+5 °C to +55 °C (41 °F to 131 °F)
Weight	0.3 kg/m
Dead Surface Region	80 mm
Roll Length	50 m (164 ft)
Unit of Measure	Meter
Product Life Cycle	Established

Data Sheet  
Printed at 12-02-2021 02:02

# VITECTOR

## FRABA

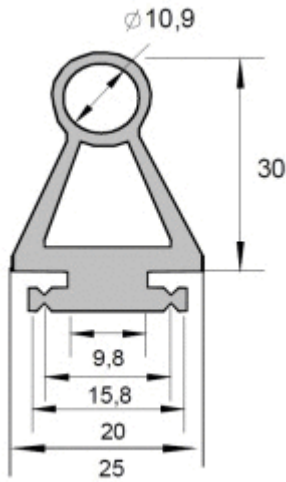

### Compatible Bumpers



Product	Height	Width
<a href="#">OSE-B 3518</a>	35 mm (1 1/3 ")	18 mm (0.71")

### Compatible Ose Sensors



Product	T Cable Length	R Cable Length
<a href="#">OPC-S 4501</a>	10.5 m (34.4 ft)	3.0 m (9.8 ft)



<a href="#">OSE-S 1100</a>	10.5 m (34.4 ft)	3.0 m (9.8 ft)
----------------------------	------------------	----------------



<a href="#">OSE-S 1102</a>	6.5 m (21.3 ft)	0.5 m (1.6 ft)
----------------------------	-----------------	----------------



<a href="#">OSE-S 1171</a>	10.5 m (34.4 ft)	10.5 m (34.4 ft)
----------------------------	------------------	------------------



<a href="#">OSE-S 1172</a>	10.5 m (34.4 ft)	3.0 m (9.8 ft)
----------------------------	------------------	----------------



<a href="#">OSE-S 1500</a>	10.5 m (34.4 ft)	3.0 m (9.8 ft)
----------------------------	------------------	----------------



<a href="#">OSE-S 1501</a>	6.5 m (21.3 ft)	3.0 m (9.8 ft)
----------------------------	-----------------	----------------

# VITECTOR

## FRABA



[OSE-S 1502](#) 6.5 m (21.3 ft) 0.5 m (1.6 ft)

[OSE-S 1508](#) 10.5 m (34.4 ft) 0.5 m (1.6 ft)

### Compatible Retainers



Product	Width Inside	Width Outside
<a href="#">ALU-2509</a>	22 mm (0.87")	25 mm (0.98")

### Contact



VITECTOR  
info@vitector.com

All dimension in [inch] mm. This drawing and the information contained is for general presentation purposes only. Please refer to the "Download" section for detailed technical drawings. © FRABA B.V., All rights reserved. We do not assume responsibility for technical inaccuracies or omissions. Specifications are subject to change without notice.