

no longer available - archive entry Alternative article: OU5070

When selecting an alternative article and accessories please note that technical data may differ!


**efector200**

OU5020



OUR-HPKG/6M

Photoelectric sensors

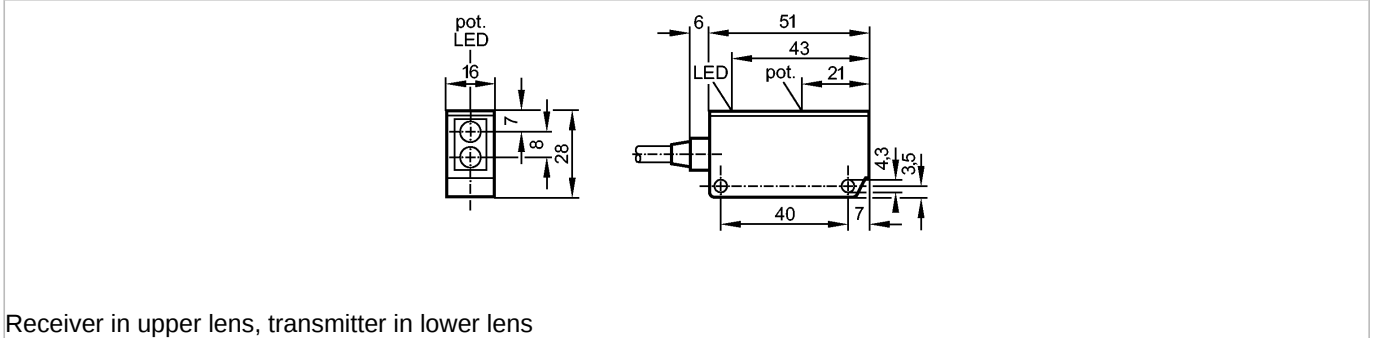

Receiver in upper lens, transmitter in lower lens



Product characteristics

Retro-reflective sensor

Rectangular, plastics

Cable

Sensing range 0.15...3m (Prismatic reflector Ø 80 (E20005))

adjustable

Electrical data

Electrical design

DC PNP

Operating voltage [V]

10...55 DC

Current consumption [mA]

35 (24 V)

Type of light

Infrared light 950 nm

Protection class

II

Reverse polarity protection

yes

Outputs

Output function

light-on mode

Voltage drop [V]

< 2.5

Current rating [mA]

250

Short-circuit protection

yes (non-latching)

Overload protection

yes

Switching frequency [Hz]

160

Monitoring range

Sensing range [m]


0.15...3 (Prismatic reflector Ø 80 (E20005))

Light spot diameter [mm]

262 ( at maximum range )

Excess gain graphs

**OU5020 - Retro-reflective sensor - eclass: 27270902 / 27-27-09-02**

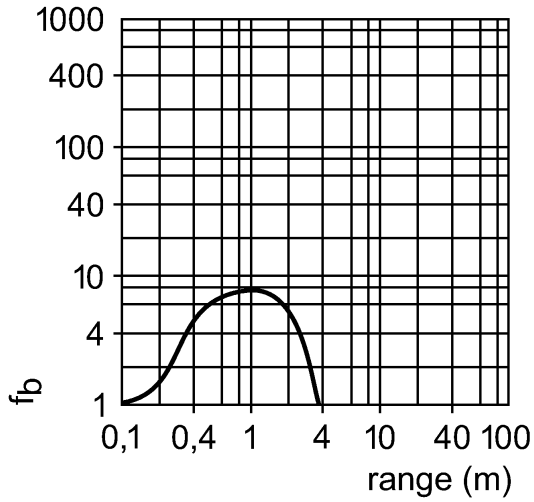


Environment		
Ambient temperature	[°C]	-25...80
Protection		IP 67
Tests / approvals		
EMC		EN 60947-5-2 EN 55011: class B
MTTF	[Years]	685
Mechanical data		
Housing materials		modified PPE
Lens material		glass
Weight	[kg]	0.298
Displays / operating elements		
Output status indication	LED	yellow
Electrical connection		
Connection		PVC cable / 6 m; 3 x 0.34 mm <sup>2</sup>

**Wiring**

Core colors

- BN brown
- BU blue
- BK black



Accessories		
Accessories (included)		Angle bracket; E20211
Remarks		
Pack quantity	[piece]	1

ifm efector, inc. • 1100 Atwater Drive • Malvern • PA 19355 — We reserve the right to make technical alterations without prior notice. — US — OU5020 — 28.05.2013  
 no longer available - archive entry Alternative article: OU5070

When selecting an alternative article and accessories please note that technical data may differ!