

no longer available - archive entry Alternative article: OU5045

When selecting an alternative article and accessories please note that technical data may differ!


efector200

OU5021



OUS-00KG/6M

Photoelectric sensors

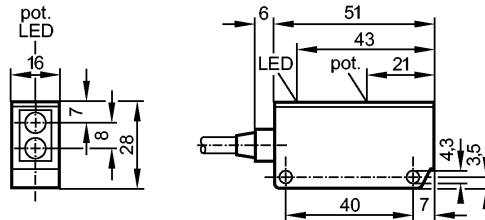

one transmitting diode in upper and lower lens



Product characteristics

Through-beam sensor

Rectangular, plastics

Cable

Transmitter

Sensing range 6m

Electrical data

Electrical design

Operating voltage [V]

Current consumption [mA]

Type of light

Protection class

Reverse polarity protection

Outputs

Short-circuit protection

Overload protection

Monitoring range

Sensing range [m]

Light spot diameter [mm]

Environment

Ambient temperature [°C]

Protection

Tests / approvals

EMC

MTTF

Mechanical data

Housing materials

Lens material

Weight [kg]

Displays / operating elements

Power

Electrical connection

Connection

Wiring

DC

10...55 DC

20 (24 V)

Infrared light 880 nm

II

yes

yes (non-latching)

yes

6

734 (at maximum range)

-25...80

IP 67

EN 60947-5-2

EN 55011:

class B

1801

modified PPO

glass

0.258


yellow

PVC cable / 6 m; 2 x 0.34 mm²

OU5021 - Through-beam sensor - eclass: 27270901 / 27-27-09-01

Core colors

BN brown
BU blue
BK black



Accessories

Accessories (included)

Angle bracket; E20211

Remarks

Pack quantity

[piece]

1

ifm efector, inc. • 1100 Atwater Drive • Malvern • PA 19355 — We reserve the right to make technical alterations without prior notice. — US — OU5021 — 28.05.2013

no longer available - archive entryAlternative article: OU5045

When selecting an alternative article and accessories please note that technical data may differ!