

no longer available - archive entry Alternative article: OU5046

When selecting an alternative article and accessories please note that technical data may differ!


**efector200**

OU5022



OUE-DPKG/6M

Photoelectric sensors

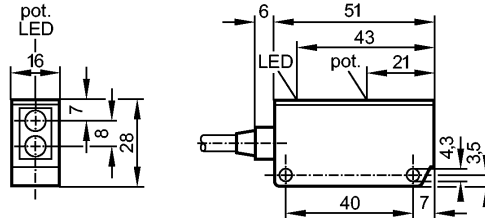

Receiver in upper lens



Product characteristics

Through-beam sensor

Rectangular, plastics

Cable

Receiver

Sensing range 6m

adjustable

Electrical data

Electrical design

DC PNP

Operating voltage [V]

10...55 DC

Current consumption [mA]

20 (24 V)

Type of light

Infrared light 880 nm

Protection class

II

Reverse polarity protection

yes

Outputs

Output function

dark-on mode

Voltage drop [V]

< 2.5

Current rating [mA]

250

Short-circuit protection

yes (non-latching)

Overload protection

yes

Switching frequency [Hz]


140

Monitoring range

Sensing range [m]

6

Excess gain graphs

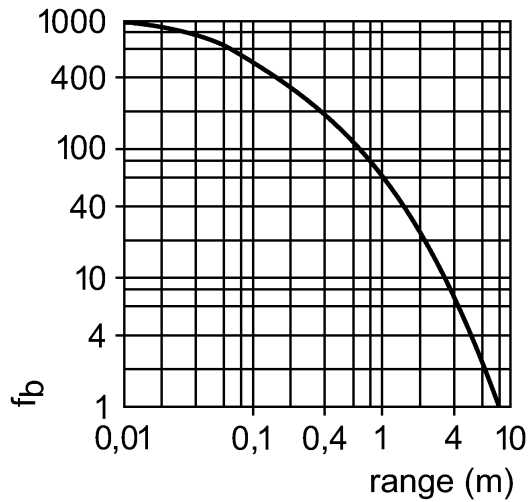


Environment	
Ambient temperature [°C]	-25...80
Protection	IP 67
Tests / approvals	
EMC	EN 60947-5-2 EN 55011: class B
MTTF [Years]	618
Mechanical data	
Housing materials	modified PPO
Lens material	glass
Weight [kg]	0.28
Displays / operating elements	
Output status indication LED	yellow
Electrical connection	
Connection	PVC cable / 6 m; 3 x 0.34 mm <sup>2</sup>

**Wiring**

Core colors

- BN brown
- BU blue
- BK black



Accessories	
Accessories (included)	Angle bracket; E20211
Remarks	
Pack quantity [piece]	1

ifm efector, inc. • 1100 Atwater Drive • Malvern • PA 19355 — We reserve the right to make technical alterations without prior notice. — US — OU5022 — 28.05.2013  
 no longer available - archive entry Alternative article: OU5046

When selecting an alternative article and accessories please note that technical data may differ!