




**Accessories for actuator/sensor cables
male flange with strands, front-mounted
FS3-0.5/13.5**

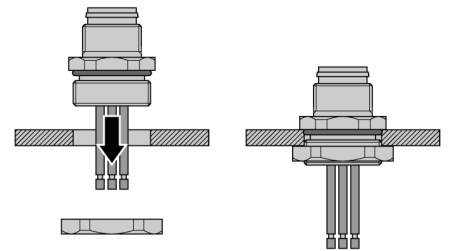

- M12 × 1 male receptacle
- Protection class IP67
- Front panel mounting
- Connected via stranded wires

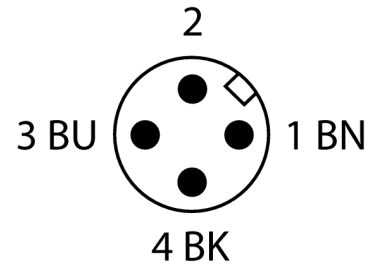

Type designation	FS3-0.5/13.5
Ident no.	6935707
Connector A side	Male receptacle, M12x1, Straight
Number of pins	3
Contacts	Brass, CuZn, Gold-plated
Contact carriers	Plastic, PA GF, Black
Flange housing	Brass, CuZn, nickel-plated
Screw-in thread seal	plastic, NBR
Screw-in thread	PG13.5
Connection mode	Wire connection
Mechanical lifespan	> 100 Mating cycles
Pollution degree	3
Protection class	IP67, (screwed together)
Cable length	0.5 m
Core insulation	PVC
Core colors	BN, BU, BK
Core cross-section	3x0.34mm ²
Electrical features at +20 °C	
Rated voltage	250 V
Current	4 A
Insulation resistance	≥ 10 ⁸ Ω
Forward resistance	≤ 5 mΩ
Mechanical and chemical properties	
Ambient temperature	
Stationary	-30...+90°C