


**PN2226**

PN-2.5-RBN14-MFRKG/US/ IV

Pressure sensors

New generation available: PN2296

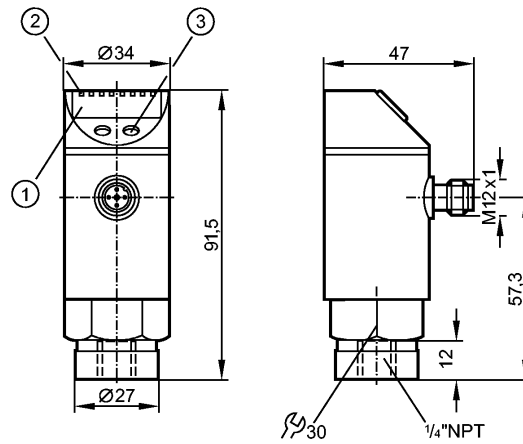

- 1: 4-digit alphanumeric display
- 2: LEDs (display unit / switching status)
- 3: Programming button



**Product characteristics**

Combined pressure sensor

Quick disconnect

Zero and span adjustable

Function programmable

Process connection: 1/4" NPT

2 outputs

OUT1 = switching output

OUT2 = switching output or analog output

4-digit alphanumeric display

Measuring range: -1.45...36.25 psi / -0.13...2.50 bar / -12.5...250.0 kPa

**Application**

Application	Type of pressure: relative pressure Liquids and gases		
Pressure rating	290 psi	20 bar	2000 kPa
Bursting pressure min.	725 psi	50 bar	5000 kPa
Medium temperature [°C]	-25...80		

**Electrical data**

Electrical design	DC PNP/NPN
Operating voltage [V]	18...32 DC <sup>1)</sup>
Current consumption [mA]	< 35
Insulation resistance [MΩ]	> 100 (500 V DC)
Protection class	III
Reverse polarity protection	yes

**Outputs**

Output	2 outputs OUT1 = switching output OUT2 = switching output or analog output
Output function	2 x normally open / closed programmable or 1 x normally open / closed programmable + 1 x analog (4...20 mA / 0...10 V; programmable 1:4)

**PN2226**

PN-2.5-RBN14-MFRKG/US/ IV

**Pressure sensors**

Current rating	[mA]	2 x 250
Voltage drop	[V]	< 2
Short-circuit protection		yes (non-latching)
Overload protection		yes
Switching frequency	[Hz]	≤ 500
Analog output		4...20 mA / 0...10 V
Max. load	[Ω]	4...20 mA: max. (U <sub>b</sub> - 10 V) x 50 / 0...10 V: min. 2000

Measuring / setting range			
Measuring range	-1.45...36.25 psi	-0.13...2.50 bar	-12.5...250.0 kPa
Setting range			
Set point, SP	-1.50...36.25 psi	-0.11...2.50 bar	-10.5...250.0 kPa
Reset point, rP	-1.65...36.10 psi	-0.12...2.49 bar	-11.5...249.0 kPa
Analog start point, ASP	-1.80...27.20 psi	-0.13...1.88 bar	-12.5...187.5 kPa
Analog end point, AEP	7.25...36.25 psi	0.50...2.50 bar	50.0...250.0 kPa
in steps of	0.05 psi	0.01 bar	0.5 kPa
Factory setting	SP1 = 9.05 psi; rP1 = 8.35 psi SP2 = 27.20 psi; rP2 = 26.45 psi ASP = 0.00 psi; AEP = 36.25 psi		

Accuracy / deviations	
Accuracy / deviations (in % of the span) Turn down 1:1	
Switch point accuracy	< ± 0.4
Characteristics deviation *)	< ± 0.25 (BFSL) / < ± 0.5 (LS)
Hysteresis	< ± 0.1
Repeatability **)	< ± 0.1
Long-term stability ***)	< ± 0.1
Temperature coefficients (TEMPCO) in the temperature range 0...80° C (in % of the span per 10 K)	
Greatest TEMPCO of the zero point	< ± 0.2
Greatest TEMPCO of the span	< ± 0.2

Reaction times	
Power-on delay time	[s] 0.3
Min. response time switching output	[ms] 1.5
Damping for the switching output (dAP)	[s] 0; 0.01...4.00
Damping for the analog output (dAA)	[s] 0; 0.01...4.00
Response time analog output	[ms] 3
Integrated watchdog	yes

Software / programming	
Programming options	hysteresis / window function; N.O. / N.C; output polarity; current / voltage outputs; damping; calibration of displayed values; display can be rotated / deactivated; display unit

Interfaces	
IO-Link Device	
Transfer type	COM2 (38.4 kBaud)
IO-Link revision	1.0

Environment	
-------------	--

**PN2226**

PN-2.5-RBN14-MFRKG/US/ IV

**Pressure sensors**

Ambient temperature	[°C]	-25...80
Storage temperature	[°C]	-40...100
Protection		IP 65

**Tests / approvals**

EMC	EN 61000-4-2 ESD:	4 kV CD / 8 kV AD
	EN 61000-4-3 HF radiated:	10 V/m
	EN 61000-4-4 Burst:	2 kV
	EN 61000-4-5 Surge:	0.5/1 kV
	EN 61000-4-6 HF conducted:	10 V
Shock resistance	DIN IEC 68-2-27:	50 g (11 ms)
Vibration resistance	DIN IEC 68-2-6:	20 g (10...2000 Hz)
MTTF	[Years]	131

**Mechanical data**

Process connection	¼" NPT
Materials (wetted parts)	stainless steel (303S22); ceramics; FPM (Viton)
Housing materials	stainless steel (304S15); stainless steel 316L / 1.4404; PC (Makrolon); PBT (Pocan); PEI; FPM (Viton); PTFE
Switching cycles min.	100 million
Weight	[kg] 0.265

**Displays / operating elements**

Display	Display unit 3 x LED green Switching status 2 x LED yellow Function display 4-digit alphanumeric display Measured values 4-digit alphanumeric display
---------	--





**Electrical connection**

Connection	M12 connector; gold-plated contacts
------------	-------------------------------------

**Wiring**

Programming of the output function (OUT1 / OUT2):

- Hno = hysteresis / normally open
- Hnc = hysteresis / normally closed
- Fno = window function / normally open
- Fnc = window function / normally closed
- Complementary outputs:  
output 1: = Hno, output 2: = Hnc  
(with the same SP / rP)



Programming of the analog output (OUT2):

- I = current output (4...20 mA)
- U = voltage output (0...10 V)



**Remarks**

Remarks	1) to EN50178, SELV, PELV *) BFSL = Best Fit Straight Line / LS = Limit Value Setting **) with temperature fluctuations < 10 K ***) in % of the span per year
---------	--

Pack quantity	[piece]	1
---------------	---------	---