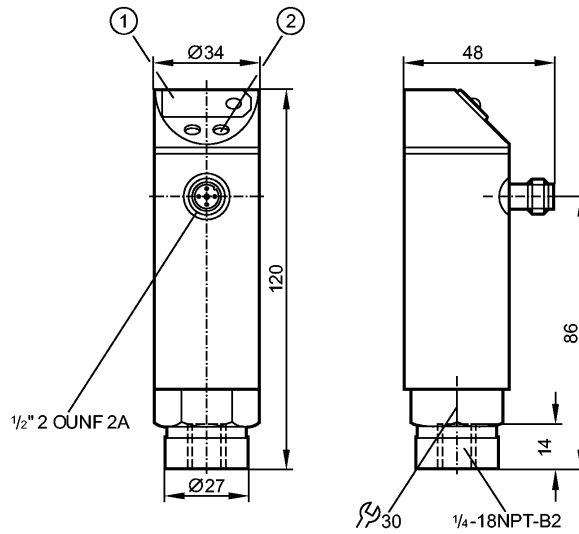


**PN4226**

PN-2.5-RBN14-HFBOW/LS/ IV

Pressure sensors



- 1: 7-segment LED display
- 2: Programming button



**Product characteristics**

Electronic pressure monitor
Quick disconnect
Function programmable
Process connection: 1/4" NPT I
Switching output
7-segment LED display
Measuring range: 0...2.5 bar / 0...36.3 psi / 0...250 kPa

**Application**

Application	Type of pressure: relative pressure Liquids and gases		
Pressure rating	20 bar	290 psi	2000 kPa
Bursting pressure min.	50 bar	725 psi	5000 kPa
Medium temperature [°C]	-25...80		

**Electrical data**

Electrical design	AC / triac
Operating voltage [V]	85...265 AC
Nominal voltage [V]	90...250 AC (45...65 Hz)
Voltage tolerance [%]	-5 / +10
Current consumption [mA]	< 10
Insulation resistance [MΩ]	> 100 (500 V DC)
Protection class	II
Reverse polarity protection	no

**Outputs**

Output	Switching output
Output function	normally open / closed programmable
Current rating [mA]	250; (...70 °C); 1000 (...60 °C); 1500 (...45 °C); 2500 (...20 °C)
Voltage drop [V]	< 2
Short-circuit proof	no

**PN4226**

PN-2.5-RBN14-HFBOW/LS/ IV


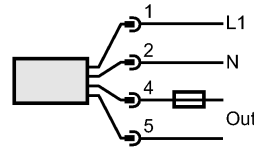
**Pressure sensors**

Overload protection	no		
Switching frequency [Hz]	≤ 160		
<b>Measuring / setting range</b>			
Measuring range	0...2.5 bar	0...36.3 psi	0...250 kPa
Setting range			
Set point, SP	0.02...2.50 bar	0.4...36.3 psi	2...250 kPa
Reset point, rP	0.01...2.49 bar	0.2...36.2 psi	1...249 kPa
in steps of	0.01 bar	0.1 psi	1 kPa
<b>Accuracy / deviations</b>			
Accuracy / deviations (in % of the span)			
Switch point accuracy	< ± 1.0		
Linearity	< ± 0.5		
Hysteresis	< ± 0.1		
Repeatability **)	< ± 0.1		
Long-term stability ***)	< ± 0.1		
Temperature coefficients (TEMPCO) in the temperature range -25...80° C (in % of the span per 10 K)			
Greatest TEMPCO of the zero point	< ± 0.2		
Greatest TEMPCO of the span	< ± 0.3		
<b>Reaction times</b>			
Power-on delay time [s]	0.2		
Delay time programmable dS, dr [s]	0, 0.2,...10, 11,...50		
Damping for the switching output (dAP) [s]	0...4		
Integrated watchdog	yes		
<b>Software / programming</b>			
Programming options	hysteresis / window function; N.O. / N.C; on delay, off delay; damping; calibration of displayed values; display can be rotated / deactivated; display unit		
Adjustment of the switch point	Programming button		
<b>Environment</b>			
Ambient temperature [°C]	-25...80		
Storage temperature [°C]	-40...100		
Protection	IP 65		
<b>Tests / approvals</b>			
EMC	EN 61000-4-2 ESD:	4 kV CD / 8 kV AD	
	EN 61000-4-3 HF radiated:	10 V/m	
	EN 61000-4-4 Burst:	2 kV	
	EN 61000-4-6 HF conducted:	10 V	
Shock resistance	DIN IEC 68-2-27:	50 g (11 ms)	
Vibration resistance	DIN IEC 68-2-6:	20 g (10...2000 Hz)	
MTTF [Years]	224.58		
<b>Mechanical data</b>			
Process connection	¼" NPT I		
Materials (wetted parts)	stainless steel (303S22); ceramics; FPM (Viton)		
Housing materials	stainless steel (304S15); PC (Makrolon); PBT (Pocan); PA; FPM (Viton)		
Switching cycles min.	100 million		
Weight [kg]	0.386		

**PN4226**

PN-2.5-RBN14-HFBOW/LS/ IV

**Pressure sensors**

Displays / operating elements	
Display	Switching status LED red Function display 7-segment LED display Measured values 7-segment LED display
Electrical connection	
Connection	1/2" UNF-Connector
<b>Wiring</b>	
Programming of the output function: Hno = hysteresis / N.O. Hnc = hysteresis / N.C. Fno = window function / N.O. Fnc = window function / N.C.	 
Note: miniature fuse to IEC60127-2 sheet 1, ≤ 5 A (fast acting)	
Remarks	
Remarks	n.c. = not connected **) with temperature fluctuations < 10 K ***) in % of the span per year Recommendation: check the unit for reliable function after a short circuit.
Pack quantity	1