


no longer available - archive entry
efector300[®]
 SU0500



SUR12XXXFRKG/W/US-100-IPF

Flow sensors

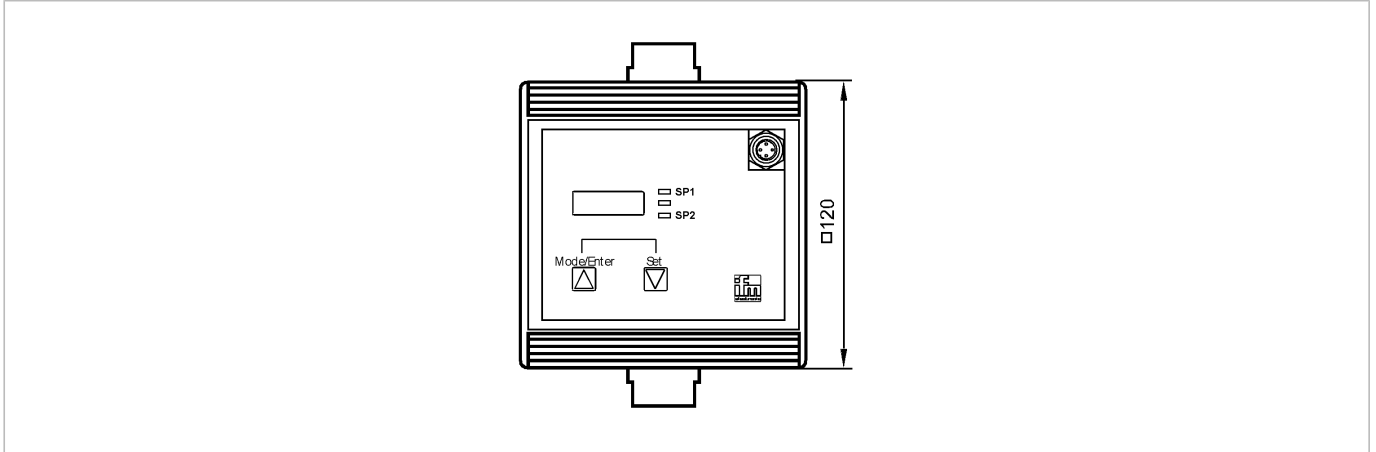

Product characteristics

Ultrasonic flow meter

Quick disconnect

Process connection: G 1/2

Function programmable

2 outputs

OUT1 = switching output

OUT2 = switching output or analog output

Application

Application

Monitoring of cooling water

Pressure rating [bar]

16

Medium temperature [°C]

5...80

Electrical data

Electrical design

DC PNP/NPN

Operating voltage [V]

20...28 DC

Current consumption [mA]

< 60

Protection class

III

Reverse polarity protection

yes

Outputs

Output function

2 x normally open / closed programmable or 1 x normally open / closed programmable + 1 x analogue (4...20 mA / 0...10 V; scaleable)

Current rating [mA]

2 x 250

Voltage drop [V]

< 2

Short-circuit protection

yes (non-latching)

Overload protection

yes

Analog output

4...20 mA; 0...10 V

Max. load [Ω]

max. 500
min. 2000

Measuring / setting range

Flow monitoring

Measuring range [l/min]

0...10

Display range [l/min]

0...12

Set point, SP [l/min]

0.1...12.0

Reset point, rP [l/min]

0.0...11.9

Analog start point, ASP [l/min]

0.0...8.0

Analog end point, AEP [l/min]

4.0...12.0

in steps of [l/min]

0.1

SU0500 - Ultrasonic flow meter - eclass: 27273101 / 27-27-31-01

Accuracy / deviations

Flow monitoring

Accuracy [% of the final value]	< ± 3
Max. temperature gradient of medium [K/min]	200

Reaction times

Power-on delay time [s]	10
-------------------------	----

Flow monitoring

Start-up delay [s]	0...50
--------------------	--------

Response time [s]	1...3
-------------------	-------

Software / programming

Programming options	hysteresis / window function; N.O. / N.C; output polarity; current / voltage output; start-up delay; calibration of displayed values; display can be deactivated; display unit
---------------------	--

Environment

Ambient temperature [°C]	10...60
--------------------------	---------

Protection	IP 65
------------	-------

Tests / approvals

EMC	EN 61000-4-2 ESD: 4 kV CD / 8 kV AD EN 61000-4-3 HF radiated: 10 V/m EN 61000-4-4 Burst: 2 kV EN 61000-4-6 HF conducted: 10 V
-----	--

Shock resistance	DIN IEC 68-2-27: 30 g (11 ms)
------------------	-------------------------------

Vibration resistance	DIN IEC 68-2-6: 5 g (10...2000 Hz)
----------------------	------------------------------------

Mechanical data

Process connection	G ½
--------------------	-----

Materials (wetted parts)	bronze (2.1096.01); stainless steel 316L / 1.4435; PPR (Hostalen); EPDM 80 shore; PES (Ultrason 2010); Centellen 200
--------------------------	--

Housing materials	brass; ABS; PA
-------------------	----------------

Weight [kg]	1.025
-------------	-------

Displays / operating elements

Display	Switching status 2 x LED yellow Calibration indicator 1 x LED yellow Measured values 7-segment LED display Programming 7-segment LED display
---------	---

Electrical connection

Connection	M12 connector; gold-plated contacts
------------	-------------------------------------

Wiring

Programming of the output function (OUT1 / OUT2):

(OUT1 / OUT2):

Hno = hysteresis / normally open

Hnc = hysteresis / normally closed





Fno = window function / normally open

Fnc = window function / normally closed

Complementary outputs:

output 1: = Hno, output 2: = Hnc

(with the same SP / rP)



Programming of the analog output (OUT2):

I = current output (4...20 mA)

U = voltage output (0...10 V)



Remarks

Pack quantity [piece]	1
-----------------------	---