

no longer available - archive entry Alternative article: TS5089 or TS5289

When selecting an alternative article and accessories please note that technical data may differ!


efector 600

TS5151



TS-500KCKD8 /US/ /V

Temperature sensors

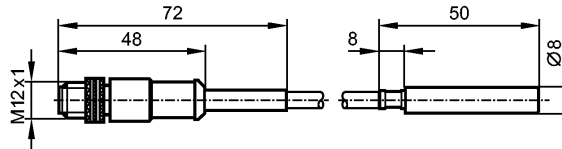

Product characteristics

Temperature sensor for connection to evaluation units

Cable with connector

gold-plated contacts

Connection to control monitor TP / TR

Measuring range: -40...150 °C / -40...302 °F

Measuring element: 1 x Pt 1000, to DIN EN 60751, class B

Application

Application

liquids and gases

Minimum installation depth [mm]

15

Electrical data

Connection to control monitor

TP / TR

Protection class

III

Measuring / setting range

Measuring range

-40...150 °C

-40...302 °F

Accuracy / deviations

Accuracy

$\pm (0.30 K + 0.005 \times |t|)$

Reaction times

Dynamic response T05 / T09 [s]

7 / 18 *)

Environment

Protection

IP 67

Tests / approvals

MTTF [Years]

22831

Mechanical data

Materials (wetted parts)

stainless steel 316L / 1.4404

Probe diameter [mm]

8

Housing materials

high-grade stainless steel; FPM (Viton)

Weight [kg]


0.241

Electrical connection

Connection

FPM (Viton) cable / 5 m; with M12 connector

Wiring



Remarks

Remarks

*) according to DIN EN 60751

The values for accuracy apply to flowing water.

Pack quantity [piece]

1

ifm efector, inc. • 1100 Atwater Drive • Malvern • PA 19355 — We reserve the right to make technical alterations without prior notice. — US — TS5151 — 17.02.2010

no longer available - archive entry Alternative article: TS5089 or TS5289

When selecting an alternative article and accessories please note that technical data may differ!