

MODEL NUMBER

TVA-R20KNAM


PRODUCT LINE

Switchbox TVA

SPECIFICATIONS

Enclosure	Composite Resin
Bus/Sensor	(2) SPDT 200mA max
Area Classification	Intrinsically safe
Visual Display	3 Way L Port, Green/Red
Shaft	NAMUR
Conduit Entries	(2) 1/2" NPT Resin
O-Rings	Silicone
Pilot	No pilot option
Spool Valve	No spool valve option
Valve Cv	No valve Cv option
Manual Override	No manual override option
Regional Certification	No regional cert option
N Switch	No N Switch

WIRING DIAGRAM

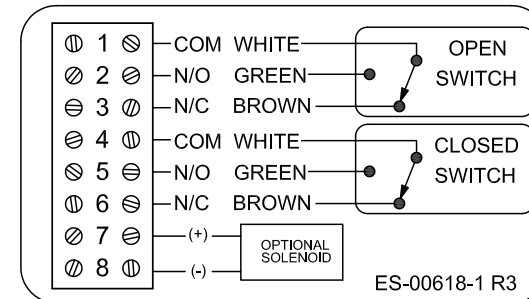

NAMEPLATE




Telemetering Equipment Hazardous Locations  
**WARNING:** Substitution of components may impair intrinsic safety. Potential electrostatic charging hazard. Clean only with a damp cloth.

Ex ia IIC T6 Gb:  
 -50°C ≤ Ta ≤ 55°C  
 Sira 13ATEX2364X IECEx SIR 13.0146X  
 SWITCH: Ui=30V, Ii=200mA, Pi=0.34W

TopWork  
 3300 Fern Valley Road  
 Louisville, KY 40213 USA  
 www.topwork.com

Model #:

Serial #:



**Electrol**

www.electrosupply.com  
 sales@electrosupply.com  
 1-800-663-6576