

MODEL NUMBER

TXP-M21FLPM


PRODUCT LINE

Switchbox TXP and TXS


SPECIFICATIONS

Enclosure	Tropicalized Aluminum
Bus/Sensor	(2) Mech SPDT
Area Classification	Explosion Proof
Visual Display	Flat-top
Shaft	1" Extended Linear Shaft
Conduit Entries	(2) 1/2" NPT
O-Rings	Silicone
Pilot	No pilot option
Spool Valve	No spool valve option
Valve Cv	No valve Cv option
Manual Override	No manual override option
Regional Certification	No regional cert option
N Switch	No N Switch

WIRING DIAGRAM

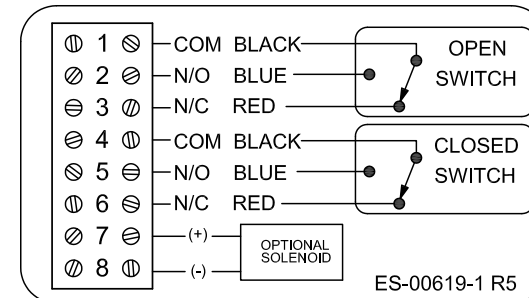

NAMEPLATE



CI I Div 1, Grps C-D; CI II Div 1, Grps E-G; -50°C ≤ Ta ≤ 60°C; Type 4X  
 Ex db IIC T6/T4 Gb; -65°C ≤ Ta ≤ 40°C/80°C  
 Ex tb IIIC T85°C/T135°C Db; -50°C ≤ Ta ≤ 40°C/80°C; IP66/67  
 Sira 04ATEX1218X IECEX SIR 06.0054X  
 Lead seal required within 18 inches of enclosure  
 SWITCH: SPDT 10A/250VAC; 3A/24VDC

TopWorx  
 3300 Fern Valley Road  
 Louisville, KY 40213 USA  
[www.topworx.com](http://www.topworx.com)

Model #:  
 Serial #:



[www.electrosupply.com](http://www.electrosupply.com)  
[sales@electrosupply.com](mailto:sales@electrosupply.com)  
 1-800-663-6576