

MODEL NUMBER

TXP-M21GNMM1A1


PRODUCT LINE

Switchbox TXP and TXS

SPECIFICATIONS

| | |
|------------------------|-------------------------------------|
| Enclosure | Tropicalized Aluminum |
| Bus/Sensor | (2) Mech SPDT |
| Area Classification | Explosion Proof |
| Visual Display | Standard 90° Green OPEN, Red CLOSED |
| Shaft | NAMUR |
| Conduit Entries | (2) M20 |
| O-Rings | Silicone |
| Pilot | (1) 24Vdc pilot fail open/closed |
| Spool Valve | Aluminum Hard Coated anodized |
| Valve Cv | 1.0 Cv (1/4" NPT Ports) |
| Manual Override | No manual override option |
| Regional Certification | No regional cert option |
| N Switch | No N Switch |

WIRING DIAGRAM

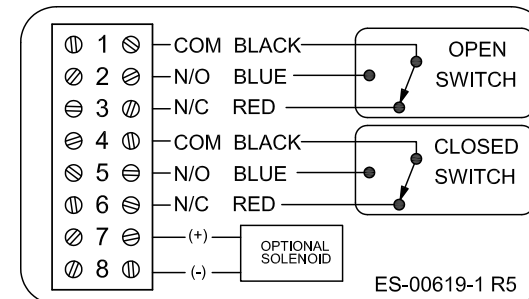


NAMEPLATE



Ex db IIB T6/T4 Gb; -65°C ≤ Ta ≤ 40°C/80°C
 Ex tb IIIC T85°C/T135°C Db; -50°C ≤ Ta ≤ 40°C/80°C; IP66/67
 Sira 04ATEX1218X IECEx SIR 06.0054X
 Lead seal required within 18 inches of enclosure
 SWITCH: SPDT 10A/250VAC; 3A/24VDC
 PILOT: 24 VDC

TopWorx
 3300 Fern Valley Road
 Louisville, KY 40213 USA
 www.topworx.com

Model #:
Serial #:



Electrol

www.electrosupply.com
 sales@electrosupply.com
 1-800-663-6576