



**MODEL NUMBER**

TXP-P22GNPM


**PRODUCT LINE**

Switchbox TXP and TXS


**SPECIFICATIONS**

Enclosure	Tropicalized Aluminum
Bus/Sensor	(2) SPDT 3A max
Area Classification	Non-incandive
Visual Display	Standard 90° Green OPEN, Red CLOSED
Shaft	NAMUR
Conduit Entries	(2) 1/2" NPT
O-Rings	Silicone
Pilot	No pilot option
Spool Valve	No spool valve option
Valve Cv	No valve Cv option
Manual Override	No manual override option
Regional Certification	No regional cert option
N Switch	No N Switch


**WIRING DIAGRAM**

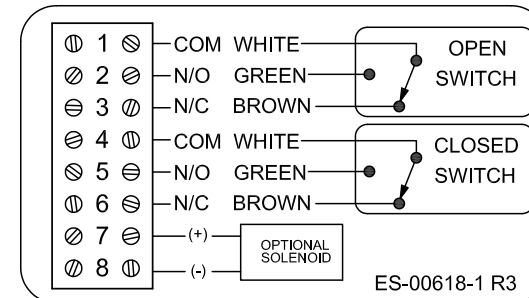

**NAMEPLATE**



CI I Div 2, Grps A-D; CI II Div 2, Grps F-G; -50°C ≤ Ta ≤ 60°C; Type 4  
 Ex nA nC IIC T6 Gc; -65°C ≤ Ta ≤ 55°C  
 Ex tc IIIC T75°C Dc; -50°C ≤ Ta ≤ 55°C; IP66/67  
 SWITCH: 33.3VDC, 3A MAX



Model #:  
Serial #:

TopWorx  
3300 Fern Valley Road  
Louisville, KY 40213 USA  
www.topworx.com

TELEMETERING EQUIP. FOR HAZ. LOC.



www.electrosupply.com  
sales@electrosupply.com  
1-800-663-6576