

MODEL NUMBER

TXP-R20GNPM1A1


PRODUCT LINE

Switchbox TXP and TXS

SPECIFICATIONS

| | |
|------------------------|-------------------------------------|
| Enclosure | Tropicalized Aluminum |
| Bus/Sensor | (2) SPDT 200mA max |
| Area Classification | Intrinsically safe |
| Visual Display | Standard 90° Green OPEN, Red CLOSED |
| Shaft | NAMUR |
| Conduit Entries | (2) 1/2" NPT |
| O-Rings | Silicone |
| Pilot | (1) 24Vdc pilot fail open/closed |
| Spool Valve | Aluminum Hard Coated anodized |
| Valve Cv | 1.0 Cv (1/4" NPT Ports) |
| Manual Override | No manual override option |
| Regional Certification | No regional cert option |
| N Switch | No N Switch |

WIRING DIAGRAM

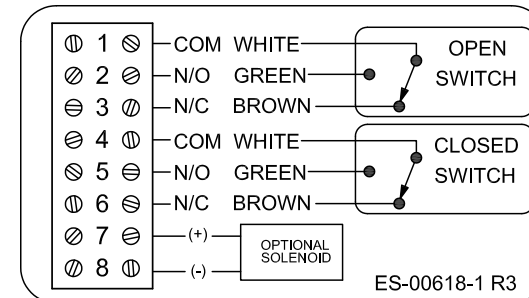


NAMEPLATE



Ex ia IIC T4 Gb; -40°C ≤ Ta ≤ 55°C
 Ex tb IIIC T75°C Db; -40°C ≤ Ta ≤ 55°C; IP66/67
 Sira 14ATEX2122X IECEx SIR 14.0045X
 SWITCH: Ui=30V, Ii=200mA, Pi=0.72W
 PILOT: Ui=28V, Ii=300mA, Pi=1.6W, Ci=0nF, Li=0mH

TopWorx
 3300 Fern Valley Road
 Louisville, KY 40213 USA
 www.topworx.com

Model #:
Serial #:



www.electrosupply.com
 sales@electrosupply.com
 1-800-663-6576