

MODEL NUMBER

TXP-R41GNPM


PRODUCT LINE

Switchbox TXP and TXS

SPECIFICATIONS

Enclosure	Tropicalized Aluminum
Bus/Sensor	(4) SPDT 200mA max
Area Classification	Explosion Proof
Visual Display	Standard 90° Green OPEN, Red CLOSED
Shaft	NAMUR
Conduit Entries	(2) 1/2" NPT
O-Rings	Silicone
Pilot	No pilot option
Spool Valve	No spool valve option
Valve Cv	No valve Cv option
Manual Override	No manual override option
Regional Certification	No regional cert option
N Switch	No N Switch

WIRING DIAGRAM

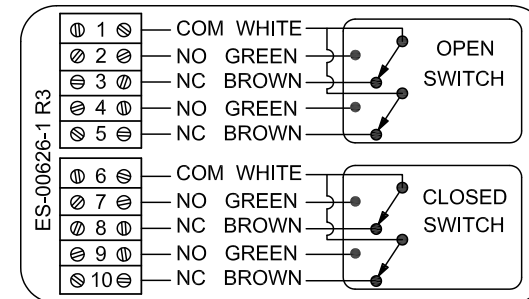

NAMEPLATE




CI I Div 1, Grps C-D; CI II Div 1, Grps E-G; $-50^{\circ}\text{C} \leq \text{Ta} \leq 60^{\circ}\text{C}$; Type 4
 Ex db IIC T6/T4 Gb; $-65^{\circ}\text{C} \leq \text{Ta} \leq 40^{\circ}\text{C}/80^{\circ}\text{C}$
 Ex tb IIC T85°C/T135°C Db; $-50^{\circ}\text{C} \leq \text{Ta} \leq 40^{\circ}\text{C}/80^{\circ}\text{C}$; IP66/67
 Sira 04ATEX1218X IECEX SIR 06.0054X
 Lead seal required within 18 inches of enclosure
 SWITCH: 30VDC/200mA

TopWorx
 3300 Fern Valley Road
 Louisville, KY 40213 USA
www.topworx.com

Model #:

Serial #:



Electrol

www.electrosupply.com
sales@electrosupply.com
 1-800-663-6576