

**MODEL NUMBER**

TXS-M21GNPM7611


**PRODUCT LINE**

Switchbox TXP and TXS

**SPECIFICATIONS**

Enclosure	316 Stainless Steel
Bus/Sensor	(2) Mech SPDT
Area Classification	Explosion Proof
Visual Display	Standard 90° Green OPEN, Red CLOSED
Shaft	NAMUR
Conduit Entries	(2) 1/2" NPT
O-Rings	Silicone
Pilot	(1) 110Vac pilot, 3VA fail open/closed
Spool Valve	316 Stainless Steel
Valve Cv	1.0 Cv (1/4" NPT Ports)
Manual Override	Single Pushbutton Momentary/Latching
Regional Certification	No regional cert option
N Switch	No N Switch

**WIRING DIAGRAM**

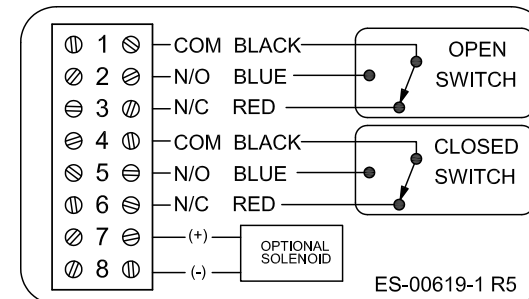


**NAMEPLATE**



Ex db IIB T6/T4 Gb; -65°C ≤ Ta ≤ 40°C/80°C  
 Ex tb IIIC T85°C/T135°C Db; -50°C ≤ Ta ≤ 40°C/80°C; IP66/67  
 Sira 04ATEX1218X IECEx SIR 06.0054X  
 Lead seal required within 18 inches of enclosure  
 SWITCH: SPDT 10A/250VAC; 3A/24VDC  
 PILOT: 110 VAC

TopWorx  
 3300 Fern Valley Road  
 Louisville, KY 40213 USA  
 www.topworx.com

**Model #:**  
**Serial #:**



www.electrosupply.com  
 sales@electrosupply.com  
 1-800-663-6576