

MODEL NUMBER

TXS-P21GLPM


PRODUCT LINE

Switchbox TXP and TXS

SPECIFICATIONS

| | |
|------------------------|-------------------------------------|
| Enclosure | 316 Stainless Steel |
| Bus/Sensor | (2) SPDT 3A max |
| Area Classification | Explosion Proof |
| Visual Display | Standard 90° Green OPEN, Red CLOSED |
| Shaft | 1" Extended Linear Shaft |
| Conduit Entries | (2) 1/2" NPT |
| O-Rings | Silicone |
| Pilot | No pilot option |
| Spool Valve | No spool valve option |
| Valve Cv | No valve Cv option |
| Manual Override | No manual override option |
| Regional Certification | No regional cert option |
| N Switch | No N Switch |

WIRING DIAGRAM

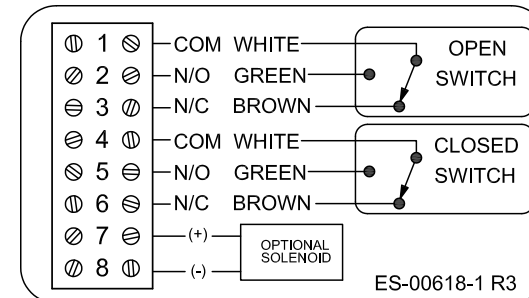


NAMEPLATE



CI I Div 1, Grps C-D; CI II Div 1, Grps E-G; -50°C ≤ Ta ≤ 60°C; Type 4
 Ex db IIC T6/T4 Gb; -65°C ≤ Ta ≤ 40°C/80°C
 Ex tb IIC T85°C/T135°C Db; -50°C ≤ Ta ≤ 40°C/80°C; IP66/67
 Sira 04ATEX1218X IECEX SIR 06.0054X
 Lead seal required within 18 inches of enclosure
 SWITCH: 33.3VDC, 3A MAX

TopWorx
 3300 Fern Valley Road
 Louisville, KY 40213 USA
 www.topworx.com

Model #:
Serial #:

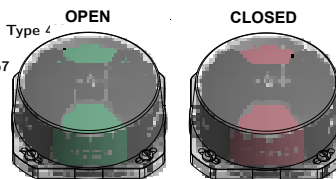

www.electrosupply.com
 sales@electrosupply.com
 1-800-663-6576