

**MODEL NUMBER**

TXS-R21GNEM


**PRODUCT LINE**

Switchbox TXP and TXS

**SPECIFICATIONS**

Enclosure	316 Stainless Steel
Bus/Sensor	(2) SPDT 200mA max
Area Classification	Explosion Proof
Visual Display	Standard 90° Green OPEN, Red CLOSED
Shaft	NAMUR
Conduit Entries	(2) 3/4" NPT
O-Rings	Silicone
Pilot	No pilot option
Spool Valve	No spool valve option
Valve Cv	No valve Cv option
Manual Override	No manual override option
Regional Certification	No regional cert option
N Switch	No N Switch

**WIRING DIAGRAM**

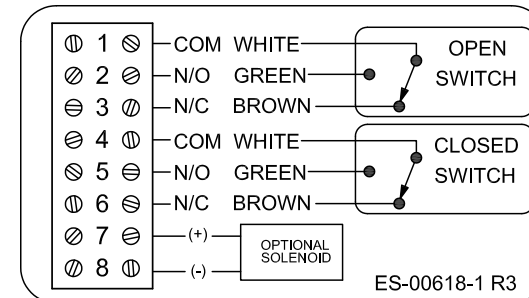


**NAMEPLATE**



CI I Div 1, Grps C-D; CI II Div 1, Grps E-G; -50°C ≤ Ta ≤ 60°C; Type 4  
 Ex db IIC T6/T4 Gb; -65°C ≤ Ta ≤ 40°C/80°C  
 Ex tb IIC T85°C/T135°C Db; -50°C ≤ Ta ≤ 40°C/80°C; IP66/67  
 Sira 04ATEX1218X IECEX SIR 06.0054X  
 Lead seal required within 18 inches of enclosure  
 SWITCH: 30VDC/200mA

TopWorx  
 3300 Fern Valley Road  
 Louisville, KY 40213 USA  
 www.topworx.com

Model #:  
 Serial #:



TELEMETERING EQUIP. FOR HAZ. LOC.



www.electrosupply.com  
 sales@electrosupply.com  
 1-800-663-6576