




Dimensions

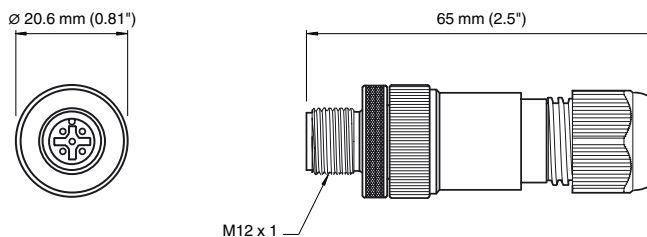

Model Number

V15-G-S-PG9

Cable connector, M12, 5-pin, ready for assembly

Features

- Screw terminal connection
- Metal locking

Technical data

General specifications

Number of pins	5
Connection 1	Male connector
Construction type 1	straight
Threading 1	M12

Electrical specifications

Operating voltage	U_B	max. 50 V DC
Operating current		max. 4 A
Volume resistance		< 8 m Ω

Ambient conditions

Ambient temperature	-25 ... 85 °C (-13 ... 185 °F)
Pollution Degree	3

Mechanical specifications

Protection degree	IP67
Connection	1 x M12 connector, straight Screw terminals for max. 0.75 mm ² PG9 cable gland
Material	
Contacts	Gold plated copper alloy
Contact surface	Au
Body	PA, black
Sleeve connector	CuZn, nickel-plated
Cable	
Sheath diameter	4 ... 8 mm

Electrical connection

