



**Model Number**


**V95-G-YE2M-STOOW**

Female cordset, 7/8", 5-pin, STOOW cable

**Features**

- Thread 7/8 inch

**Dimensions**

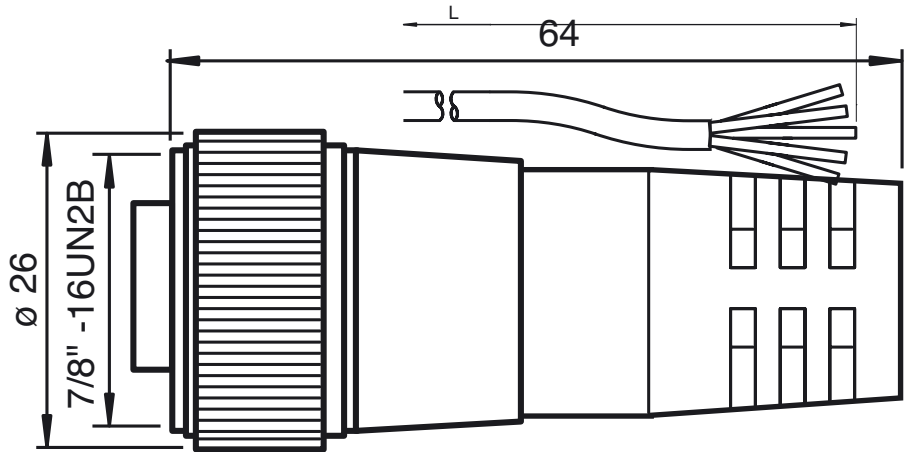

**Technical data**

**General specifications**

Number of pins 5

**Electrical specifications**

Operating voltage  $U_B$  max. 600 V  
 Test voltage 1500 V  
 Operating current  $I_B$  8 A  
 Volume resistance < 5 m $\Omega$

**Ambient conditions**

Ambient temperature -40 ... 105 °C (-40 ... 221 °F)


**Mechanical specifications**

Degree of protection IP67  
 Material  
 Contacts Cu alloy gold plated  
 Body PVC, yellow  
 Cable PVC  
 Slotted nut nickel-plated brass  
 Core insulation PVC  
 Cable fine-strand, flexible  
 Sheath diameter Ø 12.9 mm  
 Bending radius 10 x cable diameter  
 Color yellow  
 Cores 5 x 1.5 mm<sup>2</sup> (16 AWG)  
 Length L 2 m  
 Note STOOW UL Standard

**Approvals and certificates**

UL approval cULus Listed, General Purpose

**Electrical connection**



- 1) ..... WH
- 2) ..... RD
- 3) ..... GN/YE
- 4) ..... OR
- 5) ..... BK

Release date: 2017-05-19 07:57 Date of issue: 2017-05-19 912591\_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
 www.pepperl-fuchs.com

USA: +1 330 486 0001  
 fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 4411  
 fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
 fa-info@sg.pepperl-fuchs.com