



Model number


VAZ-RK-TEE

AS-Interface two port passive splitter



Features

- Passive two drop Tee for AS-Interface

Dimensions

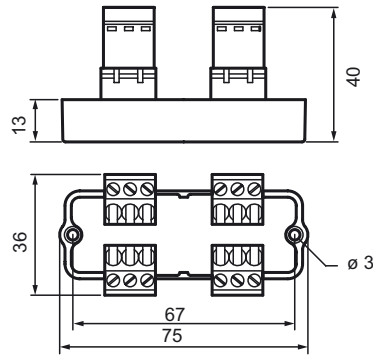

Electrical connection

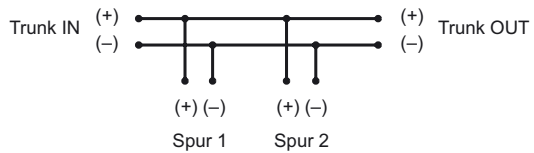

Technical data

General specifications

| | |
|-------------|--|
| Description | AS-Interface two port passive splitter |
|-------------|--|

Electrical specifications

| | | |
|-------------------------|-------|-----------------------------------|
| Rated operating voltage | U_e | 26.5 ... 31.6 V from AS-Interface |
| Rated operating current | I_e | 8 A |
| Maximum safe voltage | U_m | 35 V |

Interface

| | |
|----------|--------------|
| Protocol | AS-Interface |
|----------|--------------|

Output

| | |
|-------------|--------------------|
| Number/Type | 2/drop connections |
|-------------|--------------------|

Ambient conditions

| | |
|---------------------|--------------------------------|
| Ambient temperature | -40 ... 85 °C (-40 ... 185 °F) |
| Storage temperature | -40 ... 85 °C (-40 ... 185 °F) |

Mechanical specifications

| | |
|-------------------|--|
| Protection degree | IP20 |
| Connection | terminals: trunk in, trunk out and 2 drops |

Release date: 2010-03-30 20:12 Date of issue: 2014-01-13 904192_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".