


no longer available - archive entry

**ecomat 400**

W93016



Connection technology

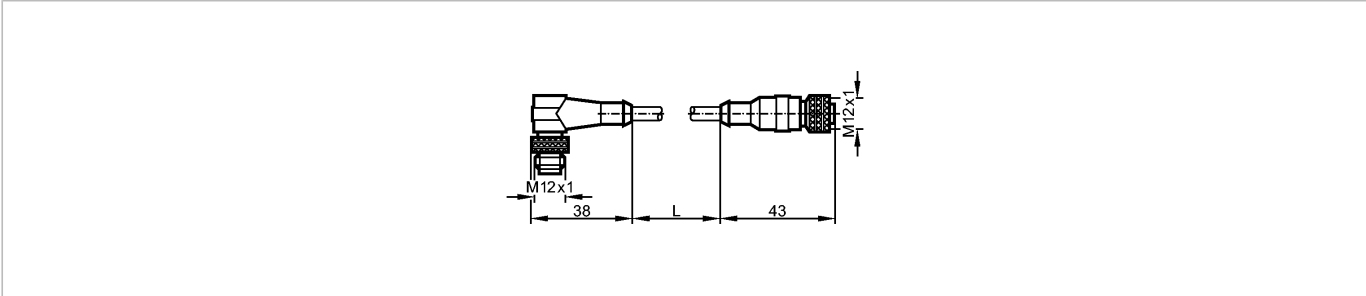

Product characteristics

Patchcords

M12 plug / M12 socket

gold-plated contacts

Electrical data

Electrical design

AC/DC

Operating voltage [V]

250 AC / 300 DC

Current rating [A]

3

Environment

Ambient temperature [°C]

-25...85

Protection

IP 68

Mechanical data

Design

angled / straight

Material body

PUR

Material nut

zinc; epoxy coated

Tightening torque for knurled nut [Nm]

plug: 0.7...0.9 / socket: 0.7...0.9

Electrical connection

Connection



PUR cable / 2 m;

3 x 0.34 mm<sup>2</sup> (42 x Ø 0.1 mm); Ø 4.3 mm; halogen-free

Sheath color

yellow

Wiring



Remarks

Pack quantity

[piece]

1

ifm efector, inc. • 1100 Atwater Drive • Malvern • PA 19355 — We reserve the right to make technical alterations without prior notice. — US — W93016 — 08.04.2016

no longer available - archive entry