




MALE END VIEW



- 1 = SHIELD
- 2 = + VOLTAGE
- 3 = - VOLTAGE
- 4 = CAN_H
- 5 = CAN_L



FEMALE END VIEW




- 1 = SHIELD
- 2 = + VOLTAGE
- 3 = - VOLTAGE
- 4 = CAN_H
- 5 = CAN_L



SPECIFICATIONS

CONTACT CARRIER MATERIAL	THERMOPLASTIC PUR
MOLDED HEAD MATERIAL/COLOR	THERMOPLASTIC PUR/GRAY
CONTACT MATERIAL/PLATING	GOLD-PLATED BRASS
COUPLING NUT MATERIAL/PLATING	NICKEL-PLATED BRASS
RATED CURRENT [A]	9.6 A
RATED VOLTAGE [V]	300 V
CABLE TYPE	AWM-STYLE, UL RECOGNIZED, CSA APPROVED
OUTER JACKET MATERIAL/COLOR	OIL RESISTANT, FLAME-RETARDANT PVC/GRAY
CONDUCTOR INSULATION MATERIAL	POLYETHYLENE
CABLE MARKING	PER UL AND CSA
CONDUCTORS [AWG]	DATA AND DRAIN - 20 AWG; (+) AND (-) VOLTAGE - 16 AWG
TEMPERATURE RATING	80°C (176°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6,13 AND IEC IP67

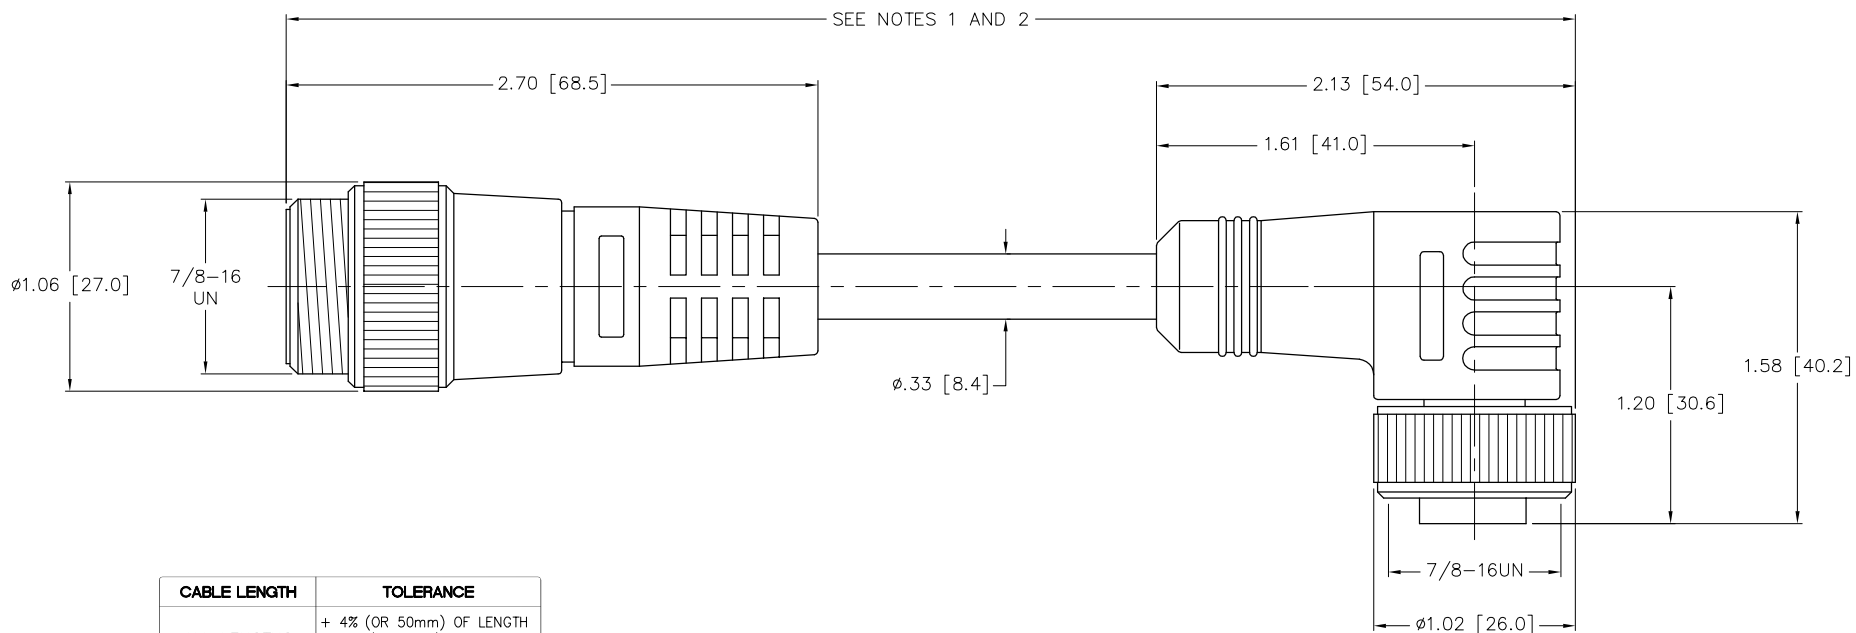

CABLE LENGTH	TOLERANCE
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

NOT FOR PRODUCTION

NOTES:

- IDENTIFICATION NUMBER SHOWN REFERS TO 1 METER LENGTH. OTHER LENGTHS AVAILABLE BY REQUEST.
- (*) DESIGNATES LENGTH IN METERS.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DOCUMENT IS PROPERTY OF InterlinkBT LLC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-888-546-5880 (763) 694-2300 (763) 694-2399 fax InterlinkBT.com	
	MATERIAL	TOLERANCES UNLESS OTHERWISE SPECIFIED .X ±0.02 .XX ±0.01 .XXX ±0.005 ANGLES ±1° ALL MILLIMETER DIMENSIONS ARE REFERENCE ONLY	DRFT CBM DSGN	DATE 08/10/00 SCALE 1=1.0	DESCRIPTION RSM WKM 5711-*M (2)
FINISH		UNIT OF MEASUREMENT INCH [MILLIMETER]		IDENTIFICATION NO. U0232-0 (1)	REV A
A	DRAWING RELEASE	CBM	08/10/00		
REV	DESCRIPTION	BY	DATE	ECO NO.	DO NOT SCALE THIS DRAWING
				FILE: MINI-C\U0232-0	SHEET 1 OF 1