



OPERATION

When voltage is applied to the input, the relay energizes. When voltage is removed, the OFF delay begins. Upon completion of the delay period, the relay de-energizes. Reset is accomplished by reapplying voltage to the input terminals. NOTE: If voltage is reappplied during the delay period, the relay remains picked up and the timer resets to zero. VOLTAGE MUST BE APPLIED FOR A MINIMUM OF 0.5 SECONDS TO ASSURE PROPER OPERATION.



True OFF-Delay Relay Output

WIRING

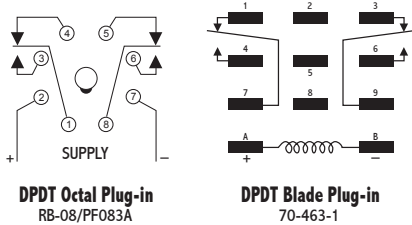

MODEL NUMBER

MODEL NUMBER	TDT					
SUPPLY VOLTAGE						
24 VAC or DC	24					
48 Volts DC	48					
110/120 VAC or DC	120					
208/240 VAC or DC	240					
TYPE OF VOLTAGE						
AC and DC operation			A			
DC operation only (D Designation used for 48V model only)			D			
TYPE OF OPERATION						
Knob Adjustable				K		
Lock Nut Adjustable				L		
Fixed				F		
ENCLOSURE STYLE						
8-pin octal plug-in					A	
Blade plug-in					B	
DELAY PERIOD						
010 = .1 to 10 SEC						010
030 = .3 to 30 SEC						030
060 = .6 to 60 SEC						060
100 = 1 to 100 SEC						100
200 = 2 to 200 SEC						200
300 = 3 to 300 SEC						300

Example: TDT-120-ALA-300—True off delay, 120 Volts AC or DC, Lock-nut adjustable, time range from 3 to 300 seconds, 8-pin octal plug-in.

SPECIFICATIONS

OUTPUT RATING	DPDT, 10 A @ 250 VAC or 24 VDC, resistive; 211 VA @ 120 VAC, inductive
TIME TOLERANCES	Minimum Setting +0 – 20% Maximum Setting ±10%
REPEATABILITY	1%
RESET TIMES	0.5 seconds
SUPPLY VOLTAGE	24 or 110/120 or 208/240 VAC, 50/60 Hz, or VDC; and 48 VDC; ±10%
FALSE TRANSFER	No
REVERSE POLARITY PROTECTED	Yes
POWER CONSUMPTION	3 watts (approximately)
TEMPERATURE RATING	Operate 32° to 131°F (0° to +55°C) Storage -49° to 185°F (-45° to +85°C)
LIFE EXPECTANCY	Mechanical 10 million operations (minimum) Electrical 100,000 operations @ rated load
WEIGHT	4.5 oz.

DIMENSIONS (INCHES)

