


Inductive Cylinder Position Sensors

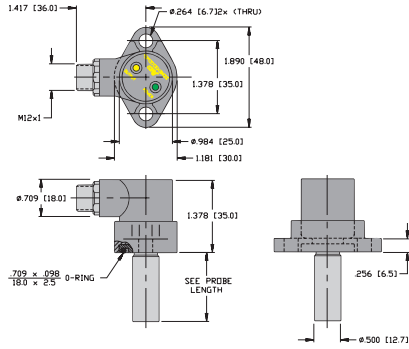

Housing Style	Part Number	ID Number	Features	Sensing Range (mm)	Output
CRS - eurofast® Connector 	Bi 2-CRS232-AN4X2-H1141/S34	T4570493	WFI	2	3-Wire DC NPN
	Bi 2-CRS260-AN4X2-H1141/S34	T4580004	WFI	2	
	Bi 2-CRS287-AN4X2-H1141/S34		WFI	2	
	Bi 2-CRS317-AN4X2-H1141/S34	T4580093	WFI	2	
	Bi 2-CRS343-AN4X2-H1141/S34	T4571890	WFI	2	
	Bi 2-CRS476-AN4X2-H1141/S34	T4568092	WFI	2	
	Bi 2-CRS524-AN4X2-H1141/S34	T4568096	WFI	2	
	Bi 2-CRS603-AN4X2-H1141/S34	T4580097	WFI	2	
	Bi 2-CRS705-AN4X2-H1141/S34		WFI	2	
	Bi 2-CRS730-AN4X2-H1141/S34	T4580088	WFI	2	
	Bi 2-CRS959-AN4X2-H1141/S34	T4571892	WFI	2	
	Bi 2-CRS1159-AN4X2-H1141/S34		WFI	2	
	Bi 2-CRS232-AP4X2-H1141/S34	T4570492	WFI	2	3-Wire DC PNP
	Bi 2-CRS260-AP4X2-H1141/S34	T4570890	WFI	2	
	Bi 2-CRS287-AP4X2-H1141/S34	T4571290	WFI	2	
	Bi 2-CRS317-AP4X2-H1141/S34	T4571690	WFI	2	
	Bi 2-CRS343-AP4X2-H1141/S34	T4571800	WFI	2	
	Bi 2-CRS476-AP4X2-H1141/S34	T4580091	WFI	2	
	Bi 2-CRS524-AP4X2-H1141/S34	T4580090	WFI	2	
	Bi 2-CRS603-AP4X2-H1141/S34	T4580096	WFI	2	
	Bi 2-CRS705-AP4X2-H1141/S34	T4580089	WFI	2	
	Bi 2-CRS730-AP4X2-H1141/S34	T4580003	WFI	2	
	Bi 2-CRS959-AP4X2-H1141/S34	T4571891	WFI	2	
	Bi 2-CRS1159-AP4X2-H1141/S34	T4570899	WFI	2	

Bi 2-CRS-XXXX-.. = Length of probe in mm.

For detailed sensor specifications see Section A.
Normally Closed versions available upon request, consult factory.



Output	Switching Freq. (Hz)	Operating Current (mA) VAC/VDC	Operating Temp. (°C)	Protection	Housing	Probe	Power LED	Output LED	Mating Cord, Cable Length/Jacket	Wiring Diagram #	Wiring Diagrams
10-65 VDC	30	≤200	-25 to +70	IP 67	Zinc	CPB	Gn	YE	RK 4T-*	1	<p>Diagram 1</p> <p>Diagram 2</p>
	30	≤200	-25 to +70	IP 67	Zinc	CPB	GN	YE	RK 4T-*	1	
	30	≤200	-25 to +70	IP 67	Zinc	CPB	GN	YE	RK 4T-*	1	
	30	≤200	-25 to +70	IP 67	Zinc	CPB	GN	YE	RK 4T-*	1	
	30	≤200	-25 to +70	IP 67	Zinc	CPB	GN	YE	RK 4T-*	1	
	30	≤200	-25 to +70	IP 67	Zinc	CPB	GN	YE	RK 4T-*	1	
	30	≤200	-25 to +70	IP 67	Zinc	CPB	GN	YE	RK 4T-*	1	
	30	≤200	-25 to +70	IP 67	Zinc	CPB	GN	YE	RK 4T-*	1	
	30	≤200	-25 to +70	IP 67	Zinc	CPB	GN	YE	RK 4T-*	1	
	30	≤200	-25 to +70	IP 67	Zinc	CPB	GN	YE	RK 4T-*	1	
	30	≤200	-25 to +70	IP 67	Zinc	CPB	GN	YE	RK 4T-*	1	
	30	≤200	-25 to +70	IP 67	Zinc	CPB	GN	YE	RK 4T-*	1	
10-65 VDC	30	≤200	-25 to +70	IP 67	Zinc	CPB	GN	YE	RK 4T-*	2	
	30	≤200	-25 to +70	IP 67	Zinc	CPB	GN	YE	RK 4T-*	2	
	30	≤200	-25 to +70	IP 67	Zinc	CPB	GN	YE	RK 4T-*	2	
	30	≤200	-25 to +70	IP 67	Zinc	CPB	GN	YE	RK 4T-*	2	
	30	≤200	-25 to +70	IP 67	Zinc	CPB	GN	YE	RK 4T-*	2	
	30	≤200	-25 to +70	IP 67	Zinc	CPB	GN	YE	RK 4T-*	2	
	30	≤200	-25 to +70	IP 67	Zinc	CPB	GN	YE	RK 4T-*	2	
	30	≤200	-25 to +70	IP 67	Zinc	CPB	GN	YE	RK 4T-*	2	
	30	≤200	-25 to +70	IP 67	Zinc	CPB	GN	YE	RK 4T-*	2	
	30	≤200	-25 to +70	IP 67	Zinc	CPB	GN	YE	RK 4T-*	2	
	30	≤200	-25 to +70	IP 67	Zinc	CPB	GN	YE	RK 4T-*	2	
	30	≤200	-25 to +70	IP 67	Zinc	CPB	GN	YE	RK 4T-*	2	

* Length in meters.

For material descriptions see page A34.