

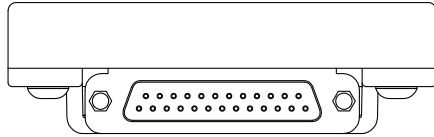


SPECIFICATIONS


HOUSING	POLYCARBONATE
CONNECTORS	P1: 25-PIN D-SUB MALE 94 V-0, U.L. RATED J0-J15: PICO MFK-3 36 VDC, VDE 0110
OPERATING FEATURES	VOLTAGE: 36 VDC, 8 A TOTAL. 0.5 A PER CONNECTOR OPERATING TEMPERATURE: -40°C TO +70°C (-40°F TO +158°F) STORAGE TEMPERATURE: -40°C TO +85°C (-40°F TO +185°F)
SUGGESTED MATING CORDSETS	DBK25-*M
SCHEMATIC	SEE SHEET 2

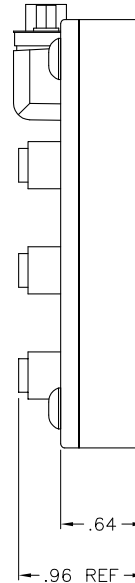


#6-32 X .75 LG (MIN) SOCKET HEAD
-OR-
M3 X 0.5 X 20 LG (MIN) SOCKET HEAD

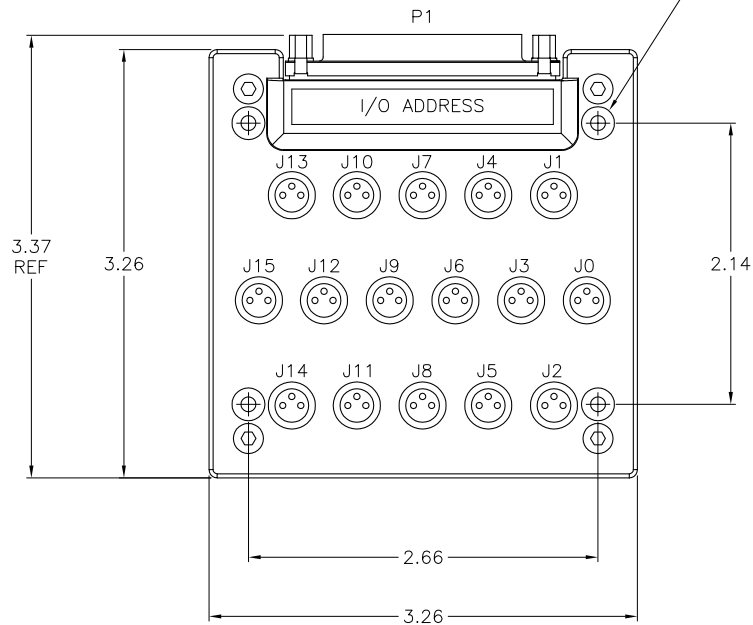

FEMALE END VIEW J0-J15

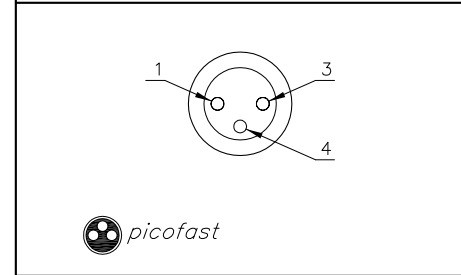

MALE END VIEW P1

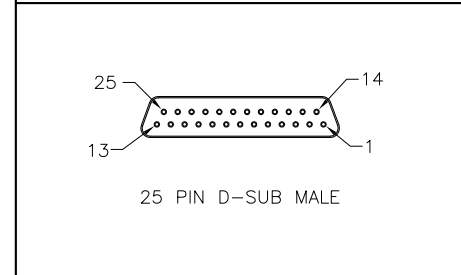

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK INC High Technology Sensors and Automation Controls 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com		
	MATERIAL	DRFT CBM	DATE 07/16/97			DESCRIPTION PTP16-DBS25
	FINISH	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	APVD	SCALE 1=1.5	IDENTIFICATION NO. U0061	
		CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT INCHES		REV D	
D	UPDATE LABEL PER ECO	TR	11/23/11	37270		
REV	DESCRIPTION	BY	DATE	ECO NO.	DO NOT SCALE THIS DRAWING	
					FILE: HP\U0061	
					SHEET 1 OF 2	

D	UPDATE LABEL PER ECO	TR	11/23/11	37270
REV	DESCRIPTION	BY	DATE	ECO NO.