





multifast® M16 Field Wireable Receptacles

- 14-Pins
- For Use with picofast Junction Box Home Run Cables
- Front or Rear Mount
- Facilitates Field Replacements



Front Mount, 14-pin

Application	Specifications	Female	Male
Field wireable 14-pin receptacle For use with picofast junction boxes	60 VAC/DC, 3.0 A Solder cup, 14/24 AWG maximum conductor size	RBKFL 1614	RBSFL 1614







Rear Mount, 14-pin

Application	Specifications	Female	Male
Field wireable 14-pin receptacle For use with picofast junction boxes	60 VAC/DC, 3.0 A Solder cup, 14/24 AWG maximum conductor size	RBKFDL 1614	RBSFDL 1614

Specifications

Housing: Nickel plated brass.
Contact Holder: Nylon.
Contacts: Gold plated copper alloy.
Temperature: -40°C to +85°C (-40°F to +185°F).
Protection Class: IEC IP 67.

Dimensions

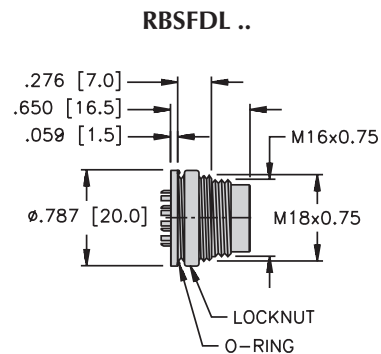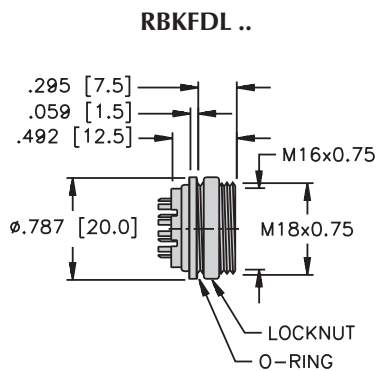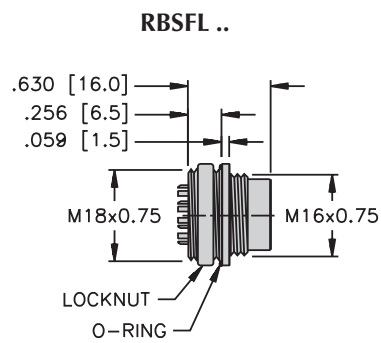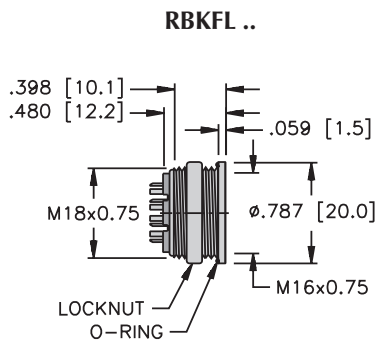

Pinout

