


Inductive Rectangular Sensors




Housing Style - Rectangular	Part Number	ID Number	Features	Embeddable	Sensing Range (mm)	Output
CK40 - Embeddable/Nonembeddable, eurofast® Connector 	Bi 15-CK40-AD4X-H1141 W/BS 2.1	M4465090		•	15	2-Wire DC
	Ni 20-CK40-AD4X-H1141 W/BS 2.1	M4465290			20	
	Bi 15U-CK40-AN6X2-H1141 W/BS 2.1	M1625690	<i>Uprox</i>	•	15	3-Wire DC NPN
	Bi 15-CK40-AN6X2-H1141 W/BS 2.1	M1625190		•	15	
	Ni 20-CK40-AN6X2-H1141 W/BS 2.1	M1625390			20	
	Ni 25U-CK40-AN6X2-H1141 W/BS 2.1	M1625789	<i>Uprox</i>		25	
	Ni 35U-CK40-AN6X2-H1141 W/BS 4	M1625810	<i>Uprox</i>		35	
	Bi 15U-CK40-AP6X2-H1141 W/BS 2.1	M1625689	<i>Uprox</i>	•	15	3-Wire DC PNP
	Bi 15-CK40-AP6X2-H1141 W/BS 2.1	M1625090		•	15	
	Ni 20-CK40-AP6X2-H1141 W/BS 2.1	M1625290			20	
Ni 25U-CK40-AP6X2-H1141 W/BS 2.1	M1625790	<i>Uprox</i>		25		
Ni 35U-CK40-AP6X2-H1141 W/BS 4	M1625800	<i>Uprox</i>		35		
Bi 15-CK40-VN4X2-H1141 W/BS 2.1	M1550190	<i>Comp. Outputs</i>	•	15	4-Wire DC NPN	
Ni 20-CK40-VN4X2-H1141 W/BS 2.1	M1550390	<i>Comp. Outputs</i>		20		
Bi 15-CK40-VP4X2-H1141 W/BS 2.1	M1550091	<i>Comp. Outputs</i>	•	15	4-Wire DC PNP	
Ni 20-CK40-VP4X2-H1141 W/BS 2.1	M1550290	<i>Comp. Outputs</i>		20		
Ni 35U-CK40-VP6X2-H1141	M1625815	<i>Uprox</i>		35		
Bi 15-CK40-Y1X-H1141	M4065000			•	15	2-Wire DC NAMUR

Note: 1. BS2.1 is the standard mounting bracket for CK40 unless noted differently.

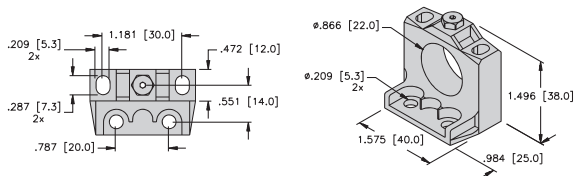

BS 2.1 Mounting Bracket

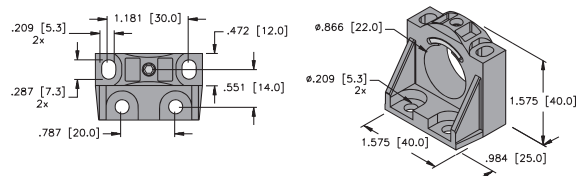

BS 4 Mounting Bracket

For detailed sensor specifications see Section M.
Normally Closed versions available upon request, consult factory.



Voltage	Switching Freq. (Hz)	Operating Current (mA)	Operating Temp. (°C)	Protection	Housing	Front Cap/Face	Power LED	Output LED	Mating Cord. Cable Length/Jacket	Wiring Diagram #	Wiring Diagrams
10-65 VDC	150	≤100	-25 to +70	IP 67	PBT	PBT	GN	YE	RK 4.2T-*	1	Diagram 1
	200	≤100	-25 to +70	IP 67	PBT	PBT	GN	YE	RK 4.2T-*	1	
10-30 VDC	250	≤200	-30 to +85	IP 68	PBT	PBT	GN	YE	RK 4T-*	2	Diagram 2
	150	≤200	-25 to +70	IP 67	PBT	PBT	GN	YE	RK 4T-*	2	
	150	≤200	-25 to +70	IP 67	PBT	PBT	GN	YE	RK 4T-*	2	
	250	≤200	-30 to +85	IP 68	PBT	PBT	GN	YE	RK 4T-*	2	
	250	≤200	-30 to +85	IP 67	PBT	PBT	GN	YE	RK 4T-*	2	
10-30 VDC	250	≤200	-30 to +85	IP 68	PBT	PBT	GN	YE	RK 4T-*	3	Diagram 3
	150	≤200	-25 to +70	IP 67	PBT	PBT	GN	YE	RK 4T-*	3	
	150	≤200	-25 to +70	IP 67	PBT	PBT	GN	YE	RK 4T-*	3	
	250	≤200	-30 to +85	IP 68	PBT	PBT	GN	YE	RK 4T-*	3	
	250	≤200	-30 to +85	IP 67	PBT	PBT	GN	YE	RK 4T-*	3	
10-65 VDC	250	≤200	-25 to +70	IP 67	PBT	PBT	GN	YE	RK 4.4T-*	4	Diagram 4
	250	≤200	-25 to +70	IP 67	PBT	PBT	GN	YE	RK 4.4T-*	4	
10-65 VDC	250	≤200	-25 to +70	IP 67	PBT	PBT	GN	YE	RK 4.4T-*	5	Diagram 5
	250	≤200	-25 to +70	IP 67	PBT	PBT	GN	YE	RK 4.4T-*	5	
	250	≤200	-25 to +70	IP 67	PBT	PBT	GN	YE	RK 4.4T-*	5	
5-30 VDC	150	Remote	-25 to +70	IP 67	PBT	PBT	N/A	YE	RK 4.21T-*	6	Diagram 6

Rectangular

For material descriptions see page M36.