
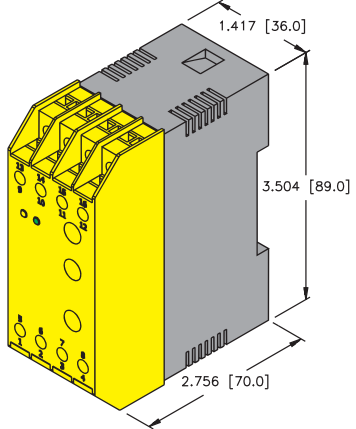


Housing Style	Part Number	ID Number	Features	Output
Level Control Monitor 24 VDC, Dip-Switch Programmable 	MK91-12-R/24VDC	M7545077	Dual Level Controller, Adjustable Time Delay	(2) SPDT Relays/Parallel
	MK91-12-R/115VAC	M7545072		
	MK91-12-R/230VAC	M7545070		
Level Control Monitor, Potentiometer/Jumper Programmable 	MS91-12-R/24VDC	M5220700	Dual Level Controller, Adjustable Time Delay	(2) SPDT Relays
	MS91-12-R/115VAC	M5221000		
	MS91-12-R/230VAC	M5220000		

Additional specifications on page M122.

Material

Housing	PC/ABS
---------	--------

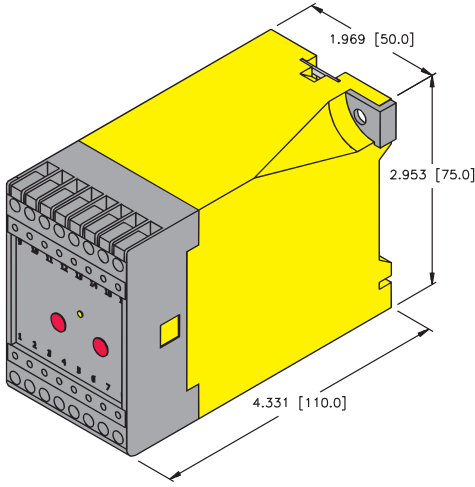

Voltage	Switching Current	Switch Point	Current Consumption	Hysteresis	Power LED	Output LED	Wiring Diagram #	Wiring Diagrams
20-28 VDC	≤3 A	0.2-100 kΩ	≤1.5 W	Approx. 10%	GN	YE	1	<p>Diagram 1</p> <p>Diagram 2</p>
98-126 VAC	≤3 A	0.2-100 kΩ	3 VA/<15 mARMS	Approx. 10%	GN	YE	1	
184-264 VAC	≤3 A	0.2-100 kΩ	3 VA/<15 mARMS	Approx. 10%	GN	YE	1	
20-28 VDC	≤4 A	0.1-100 kΩ	≤3.6 W	Approx. 10%	GN	YE	2	
98-126 VAC	≤4 A	0.1-100 kΩ	≤5 VA	Approx. 10%	GN	YE	2	
184-264 VAC	≤4 A	0.1-100 kΩ	≤5 VA	Approx. 10%	GN	YE	2	