


N0534A

NV1222/24VDC/TR/1D/1G

Evaluation systems ATEX

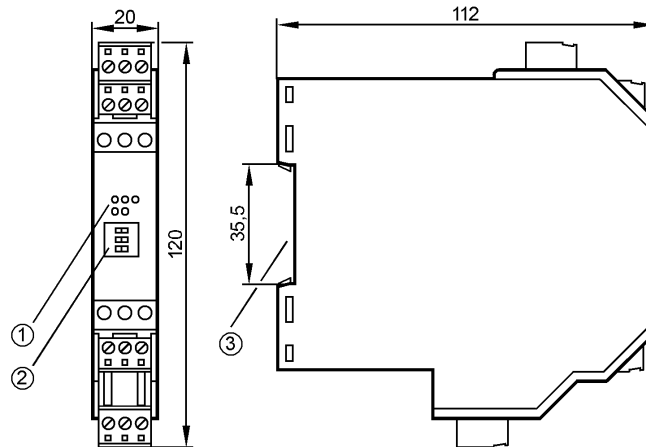

- 1: LED
- 2: selector switch
- 3: Mounting on DIN rail



Product characteristics

Switching amplifier for Namur sensors according to 94/9/EG (ATEX)
ATEX approval
Group II, category (1) G D
2-channel
Transistor outputs
Programmable output function
Short-circuit and wire monitoring

Electrical data

Electrical design	DC
Operating voltage [V]	24 DC
Voltage tolerance [%]	-15 /+25
Current consumption [mA]	< 50

Outputs

Output function	2 transistor outputs PNP (100 mA, short-circuit protection)
Switching frequency [Hz]	5000
Voltage drop [V]	< 3.5
Switch points	1.2...2.1 mA

Environment

Ambient temperature [°C]	-20...60
Protection	IP 20

Tests / approvals

Approval	PTB 02 ATEX 2037 TIIS TC16049 IECEX PTB 06.0038
Marking of the unit	⊕ II (1) G [Ex ia] IIC ⊕ II (1) D [Ex ia] IIIC
EMC	EN 50081-2 (1993) EN 61326-1 (2006)
MTTF [Years]	394

Safety classification

N0534A

NV1222/24VDC/TR/1D/1G

Evaluation systems ATEX

Maximum values for control circuit

Description	in protection rating intrinsic safety [EEx ia] IIC, [EEx ia] IIB, [EEx ib] IIC, [EEx ib] IIB			
Voltage [V]	10.5			
Current [mA]	13			
Power [mW]	34			

	in protection rating intrinsic safety			
	[EEx ia] IIC	[EEx ia] IIB	[EEx ib] IIC	[EEx ib] IIB
External inductance	200 mH	740 mH	200 mH	740 mH
External capacitance	2.4 µF	16.8 µF	2.4 µF	16.8 µF

Mechanical data

Weight [kg]	0.166
-------------	-------

Displays / operating elements


Power LED	green
Output status indication LED	2 x yellow
Function display LED	2 x red

Electrical connection

Connection	terminals up to 2.5 mm ²
------------	-------------------------------------

Wiring

- 1: switch S3 in position I
- 2: switch S3 in position I
- 3: switch S3 in position I;
without short-circuit monitoring
- 4: switch S3 in position II;
without short-circuit and wire monitoring

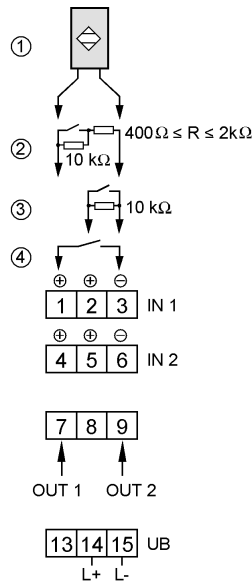

Remarks

Remarks	Please note: The control monitor must be mounted outside the hazardous area! Free terminals must not be used.
---------	--

Pack quantity [piece]	1
-----------------------	---