

MODEL NUMBER

TXP-P20JNPM1A1


PRODUCT LINE

Switchbox TXP and TXS

SPECIFICATIONS

Enclosure	Tropicalized Aluminum
Bus/Sensor	(2) SPDT 3A max
Area Classification	Intrinsically safe
Visual Display	3 Way T Port, Green/Red
Shaft	NAMUR
Conduit Entries	(2) 1/2" NPT
O-Rings	Silicone
Pilot	(1) 24Vdc pilot fail open/closed
Spool Valve	Aluminum Hard Coated anodized
Valve Cv	1.0 Cv (1/4" NPT Ports)
Manual Override	No manual override option
Regional Certification	No regional cert option
N Switch	No N Switch

WIRING DIAGRAM

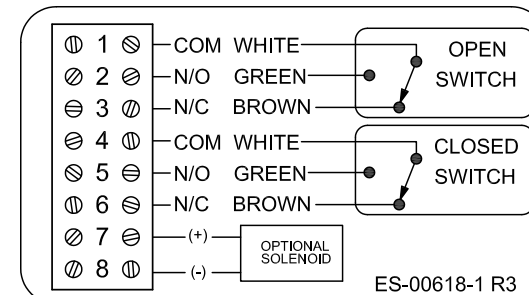

NAMEPLATE




Ex ia IIC T4 Gb; -40°C ≤ Ta ≤ 55°C
 Ex tb IIIC T75°C Db; -40°C ≤ Ta ≤ 55°C; IP66/67
 Sira 14ATEX2122X IECEx SIR 14.0045X
 SWITCH: Ui=30V, Ii=200mA, Pi=0.72W
 PILOT: Ui=28V, Ii=300mA, Pi=1.6W, Ci=0nF, Li=0mH


TopWorx
 3300 Fern Valley Road
 Louisville, KY 40213 USA
 www.topworx.com

Model #:
Serial #:


DIVERT LEFT



THRU



DIVERT RIGHT



www.electrosupply.com
 sales@electrosupply.com
 1-800-663-6576