

no longer available - archive entry Alternative article: E21103

When selecting an alternative article and accessories please note that technical data may differ!


**efector200**

E21101



FE-11-EPA-M3/F613X0.06/2M

Fiber optics

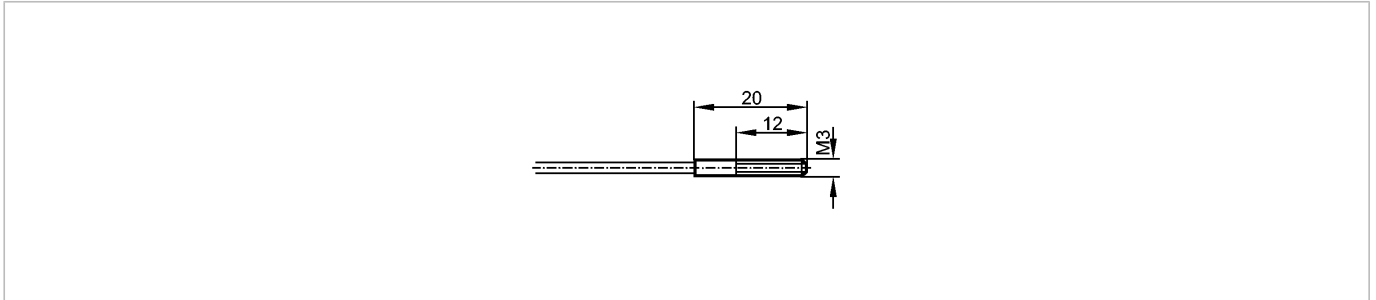

Product characteristics

Through-beam sensor

M3

Amplifier Sensing range

OB50xx 250 mm

OBFxxx 350 mm

OO50xx 750 mm

Monitoring range

Sensing range

OB50xx: 250 mm / OBFxxx: 350 mm / OO50xx: 750 mm

Environment

Ambient temperature [°C]

-40...60

Mechanical data

Design

straight

Length [mm]

2000

Min. bending radius [mm]

3

Fiber arrangement



core diameter [mm]

1.2

Fibre diameter [mm]

613 x 0.06

Outer diameter [mm]

2.2

Fiber optic

PMMA

Sensing head

aluminum

Sheathing

PE (polyethylene)

Weight [kg]

0.047

Accessories

Accessories (included)

4 hexagon nuts; M3; 4 tooth lock washers

Accessories (optional)

cutter E20600 for fibre optics (to be ordered separately)

Remarks

Pack quantity [piece]

1

ifm efector, inc. • 1100 Atwater Drive • Malvern • PA 19355 — We reserve the right to make technical alterations without prior notice. — US — E21101 — 03.11.2010

no longer available - archive entry Alternative article: E21103

When selecting an alternative article and accessories please note that technical data may differ!