

no longer available - archive entry Alternative article: IF5621

When selecting an alternative article and accessories please note that technical data may differ!


efector100

IF5866



IF-2004-FRKG/6M/PH RT

Inductive sensors

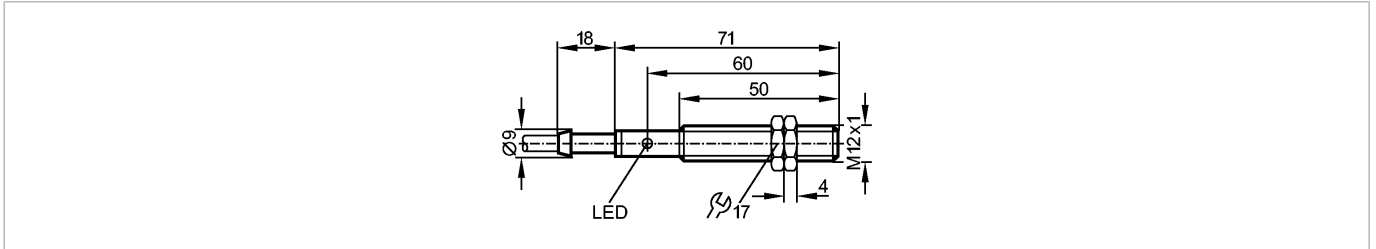

Product characteristics

Inductive sensor

Plastic thread M12 x 1

Cable

Sensing range 4 mm; [nf] non-flush mountable

Electrical data

Electrical design

DC

Operating voltage [V]

10...55 DC

Protection class

II

Reverse polarity protection

yes

Outputs

Output function

normally open / closed programmable

Voltage drop [V]

< 4.6

Minimum load current [mA]

4

Leakage current [mA]

< 0.5

Current rating [mA]

400

Short-circuit protection

yes (non-latching)

Overload protection

yes

Switching frequency [Hz]

1500

Monitoring range

Sensing range [mm]

4

Real sensing range (Sr) [mm]

4 ± 10 %

Operating distance [mm]

0...3.25

Accuracy / deviations

Correction factors

mild steel = 1 / stainless steel approx. 0.7 / brass approx. 0.4 / aluminium approx. 0.3 / copper approx. 0.2

Hysteresis [% of Sr]

1...15

Switch-point drift [% of Sr]

-10...10

Environment

Ambient temperature [°C]

-25...80

Protection

IP 67

Tests / approvals

EMC

EN 60947-5-2

EN 55011:

class B

Mechanical data

Mounting

non-flush mountable

Housing materials

PBT

Weight [kg]

0.272

Displays / operating elements

Output status indication LED

red

Electrical connection

Connection

PUR / PVC cable / 6 m; 2 x 0.34 mm²

Wiring

IF5866 - Inductive sensor - eclass: 27270101 / 27-27-01-01

Core colors
BK black
WH white



Accessories

Accessories (included)

2 lock nuts

Remarks

Pack quantity

[piece]

1

ifm efector, inc. • 1100 Atwater Drive • Malvern • PA 19355 — We reserve the right to make technical alterations without prior notice. — US — IF5866 — 06.03.2003

no longer available - archive entry Alternative article: IF5621

When selecting an alternative article and accessories please note that technical data may differ!