


Model Number

NBB15-30GK-WO

Features

- Basic series
- 15 mm quasi-embeddable

Connection




Accessories

BF 30

Mounting flange, 30 mm

Dimensions

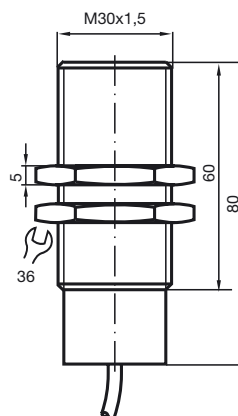

Technical Data

General specifications

Switching element function	AC	NC
Rated operating distance	s_n	15 mm
Installation	quasi embedd.	
Output polarity	AC	
Assured operating distance	s_a	0 ... 12.15 mm
Reduction factor r_{Al}	0.43	
Reduction factor r_{Cu}	0.41	
Reduction factor r_{303}	0.82	

Nominal ratings

Operating voltage	U_B	20 ... 250 V
Switching frequency	f	0 ... 25 Hz
Hysteresis	H	typ. 5 %
Short-circuit protection	no	
Voltage drop	U_d	≤ 8 V
Momentary current (20 ms, 0.1 Hz)	0 ... 1600 mA	
Operating current	I_L	1.5 ... 200 mA
Off-state current	I_r	0 ... 1.5 mA typ.

Ambient conditions

Ambient temperature	-25 ... 70 °C (-13 ... 158 °F)
---------------------	--------------------------------

Mechanical specifications

Connection type	cable PVC , 2 m
Core cross-section	0.75 mm ²
Housing material	PBT
Sensing face	PBT
Protection degree	IP68

Note

¹⁾ In the temperature range below 0 °C, permissible operating voltage U_b 80...253 V
Safety fuse ≤ 0.3 A (quick-blow) according to IEC 60127-2 Sheet 1
Recommendation: after a short circuit, check that the device is functioning correctly.


Compliance with standards and directives

Standard conformity	
Standards	EN 60947-5-2:2007 IEC 60947-5-2:2007

Approvals and certificates

UL approval	cULus Listed, General Purpose
CSA approval	cCSAus Listed, General Purpose
CCC approval	Certified by China Compulsory Certification (CCC)

Installation conditions



Installation conditions

