

Alternative article: O8P200

When selecting an alternative article and accessories please note that technical data may differ!


efector200

OH5010



OHP-DPKG/2M

Photoelectric sensors

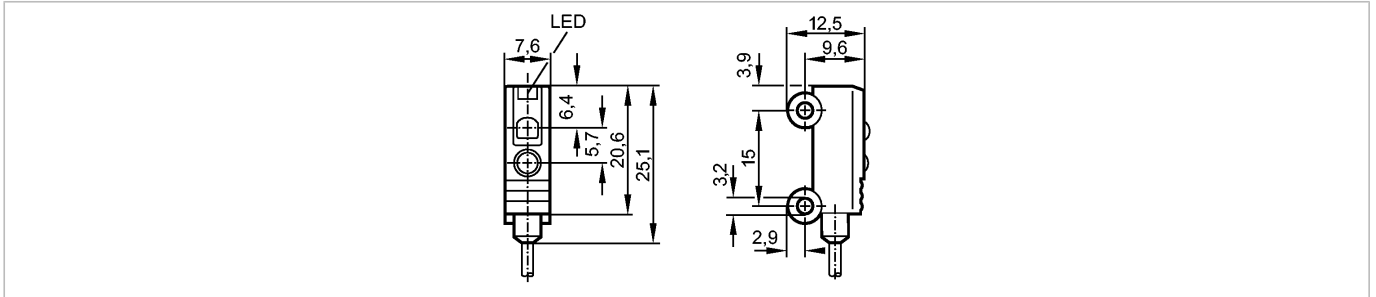

Product characteristics

Retro-reflective sensor

Rectangular, plastics

Cable

Polarization filter

Sensing range 0.8m (Prismatic reflector Ø 35 (E20004))

Electrical data

Electrical design

DC PNP

Operating voltage [V]

10...30 DC

Current consumption [mA]

< 20

Type of light

red light

Life expectancy typ. [h]

75000 (25 °C)

Protection class

III

Reverse polarity protection

yes

Outputs

Output function

dark-on mode

Current rating [mA]

50

Short-circuit protection

yes (non-latching)

Overload protection

yes

Switching frequency [Hz]

800

Monitoring range

Sensing range [m]

0.8 (Prismatic reflector Ø 35 (E20004))

Light spot diameter [mm]

10 (Sensing range 100 mm)

Reaction times

Response time [ms]

< 0.6

Environment

Ambient temperature [°C]

-20...50

Protection

IP 67

Tests / approvals

EMC

EN 60947-5-2

Mechanical data

Housing materials

ABS

Lens material

PMMA

Weight [kg]

0.028

Displays / operating elements

Output status indication LED

yellow (permanently lit)

Unsafe zone LED

yellow (flashing)

Electrical connection

Connection


PVC cable / 2 m; 3 x 0.09 mm²

Wiring

OH5010 - Retro-reflective sensor - eclass: 27270902 / 27-27-09-02

Core colors

BK black
BN brown
BU blue



Remarks

Pack quantity [piece] 1

ifm efector, inc. • 1100 Atwater Drive • Malvern • PA 19355 — We reserve the right to make technical alterations without prior notice. — US — OH5010 — 06.03.2003

Alternative article: O8P200

When selecting an alternative article and accessories please note that technical data may differ!