

no longer available - archive entry


**efector200**

OU5016



OUR-DNKG

Photoelectric sensors

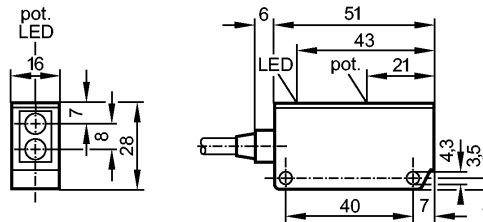

Receiver in upper lens, transmitter in lower lens



Product characteristics

Retro-reflective sensor

Rectangular, plastics

Cable

Sensing range 0.15...3m (Prismatic reflector Ø 80 (E20005))

adjustable

Electrical data

Electrical design

DC NPN

Operating voltage [V]

10...55 DC

Current consumption [mA]

35 (24 V)

Type of light

Infrared light 950 nm

Protection class

II

Reverse polarity protection

yes

Outputs

Output function

dark-on mode

Voltage drop [V]

< 2.5

Current rating [mA]

250

Short-circuit protection

yes (non-latching)

Overload protection

yes

Switching frequency [Hz]

160

Monitoring range

Sensing range [m]

0.15...3 (Prismatic reflector Ø 80 (E20005))

Light spot diameter [mm]

262 ( at maximum range )

Excess gain graphs




**OU5016 - Retro-reflective sensor - eclass: 27270902 / 27-27-09-02**

Environment	
Ambient temperature [°C]	-25...80
Protection	IP 67
Tests / approvals	
EMC	EN 60947-5-2 EN 55011: class B
MTTF [Years]	685
Mechanical data	
Housing materials	modified PPO
Lens material	glass
Weight [kg]	0.159
Displays / operating elements	
Output status indication LED	yellow
Electrical connection	
Connection	PVC cable / 2 m; 3 x 0.34 mm <sup>2</sup>

**Wiring**

Core colors

- BN brown
- BU blue
- BK black



Accessories	
Accessories (included)	Angle bracket; E20211
Remarks	
Pack quantity [piece]	1