




TT-100KBBD10-...../US/

Temperature sensors

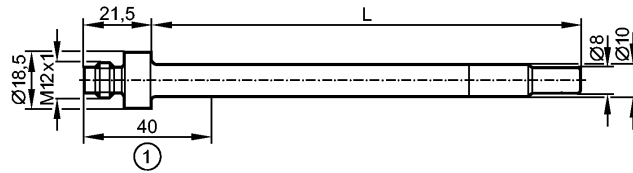

1: plug area

L = probe length (corresponds to installation length EL)



Product characteristics

Temperature sensor for connection to evaluation units

Quick disconnect

Installation length EL: 160 mm

gold-plated contacts

Connection to control monitor TP / TR

Measuring range: -40...150 °C / -40...302 °F


Measuring element: 1 x Pt 1000, to DIN EN 60751, class A

Application

Application	liquids and gases	
Pressure rating [bar]	160	
Minimum installation depth [mm]	15	
Electrical data	TP / TR	
Connection to control monitor	TP / TR	
Protection class	III	
Measuring / setting range		
Measuring range	-40...150 °C	-40...302 °F
Accuracy / deviations		
Accuracy	± (0.15 K + 0.002 x  t )	
Reaction times		
Dynamic response T05 / T09 [s]	1 / 3 *)	
Environment		
Ambient temperature [°C]	-25...80, for the plug area	
Storage temperature [°C]	-40...100	
Protection	IP 68 / IP 69K	
Tests / approvals		
Shock resistance	DIN EN 60068-2-27	50 g (11 ms)
Vibration resistance	DIN EN 60068-2-6	10 g (10...2000 Hz)
MTTF [Years]	22831	
Mechanical data		
Materials (wetted parts)	stainless steel 316L / 1.4404	
Probe diameter [mm]	10	
Probe length L [mm]	160	
Installation length EL [mm]	160	
Housing materials	stainless steel 316L / 1.4404	
Weight [kg]	0.054	
Electrical connection		
Connection	M12 connector; gold-plated contacts	

Wiring

**TT1050 - Temperature sensor for connection to evaluation units - eclass: 27200214 / 27-20-02-14**



Remarks

Remarks

\*) according to DIN EN 60751

The values for accuracy apply to flowing water.

Pack quantity

[piece]

1