



Model Number


V93-G-YE10M-STOOW

Female cordset, 7/8", 3-pin, STOOW cable

Features

- Thread 7/8 inch

Dimensions

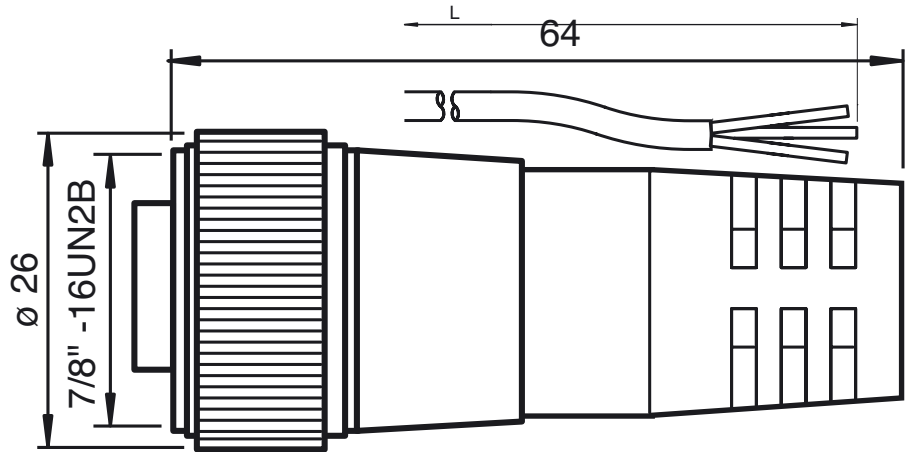

Technical data

General specifications

Number of pins 3

Electrical specifications

Operating voltage U_B max. 600 V
 Test voltage 1500 V
 Operating current I_B 13 A
 Volume resistance < 5 m Ω

Ambient conditions

Ambient temperature -40 ... 105 °C (-40 ... 221 °F)


Mechanical specifications

Degree of protection IP67
 Material
 Contacts Cu alloy gold plated
 Body PVC, yellow
 Cable PVC
 Slotted nut nickel-plated brass
 Core insulation PVC
 Cable fine-strand, flexible
 Sheath diameter Ø 9.9 mm
 Bending radius 10 x cable diameter
 Color yellow
 Cores 3 x 1.5 mm² (16 AWG)
 Length L 10 m
 Note STOOW UL Standard

Approvals and certificates

UL approval cULus Listed, General Purpose

Electrical connection



- 1) GN/YE
- 2) BK
- 3) WH

Release date: 2017-05-19 08:00 Date of issue: 2017-05-19 912583_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
 www.pepperl-fuchs.com

USA: +1 330 486 0001
 fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 4411
 fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
 fa-info@sg.pepperl-fuchs.com