



Model Number


V95-W-YE4M-STOOW

Female cordset, 7/8", 5-pin, STOOW cable

Features

- Thread 7/8 inch

Dimensions

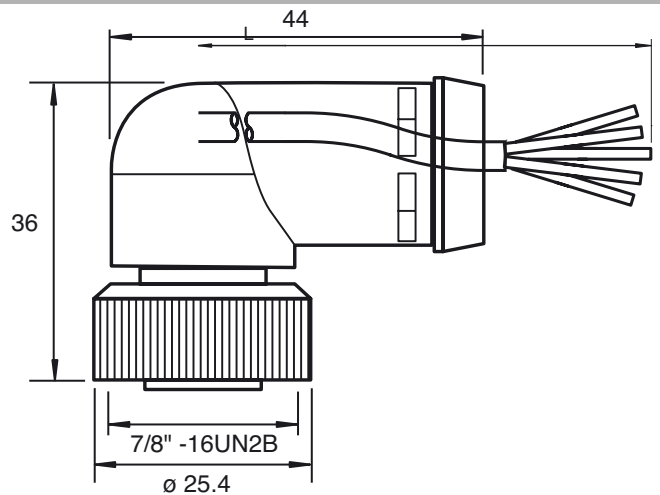

Technical data

General specifications

Number of pins 5

Electrical specifications

Operating voltage U_B max. 600 V

Test voltage 1500 V

Operating current I_B 8 A

Volume resistance $< 5 \text{ m}\Omega$

Ambient conditions

Ambient temperature $-40 \dots 105 \text{ }^\circ\text{C}$ ($-40 \dots 221 \text{ }^\circ\text{F}$)

Mechanical specifications

Degree of protection IP67

Material

Contacts Cu alloy gold plated

Body PVC, yellow

Cable PVC

Slotted nut nickel-plated brass

Core insulation PVC

Cable fine-strand, flexible

Sheath diameter $\text{\O} 12.9 \text{ mm}$

Bending radius 10 x cable diameter

Color yellow

Cores 5 x 1.5 mm² (16 AWG)


Length L 4 m

Note STOOW UL Standard

Approvals and certificates

UL approval cULus Listed, General Purpose

Electrical connection



- 1) WH
- 2) RD
- 3) GN/YE
- 4) OR
- 5) BK

Release date: 2017-05-19 07:56 Date of issue: 2017-05-19 912595_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 4411
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com