



Product availability : Stock - Normally stocked in distribution facility



### Main

Range of product	Harmony XVB Universal
Product or component type	Base unit with cover
Component name	XVBC
Material	Glass reinforced polyamide base unit Polycarbonate cover unit

### Complementary

Fixing mode	Direct or tube fixing
Mounting diameter	2.76 in (70 mm)
Product destination	Banks without flash discharge tube unit
Electrical connection	1 connector for standard input
Cable entry	Bottom or side entry
Assembly style	Customer assembly, up to 5 units
Terminals description ISO n°1	(GND)GROUND (COM-2)PW (COM-3)PW (COM-1)PW (COM-5)PW (COM-4)PW
Product weight	0.42 lb(US) (0.19 kg)

### Environment

Product certifications	UL 508 CCC GOST CSA C22-2 No 14
Standards	EN/IEC 60947-5-1
Protective treatment	TC

---

Ambient air temperature for storage	-40...158 °F (-40...70 °C)
NEMA degree of protection	NEMA 4X indoor UL 508

---

### Ordering and shipping details

---

Category	22611 - XVB-STACKLIGHTS
Discount Schedule	XV
GTIN	00785901845027
Nbr. of units in pkg.	1
Package weight(Lbs)	0.45000000000000001
Returnability	Y
Country of origin	ID

---

### Contractual warranty

---


Warranty period	18 months
-----------------	-----------

---

Indicator Bank without “Flash” Discharge Tube Unit

Dimensions

Below drawing shows the minimum configuration of the product. Select the number of stages according to the product characteristics in order to get b dimension.

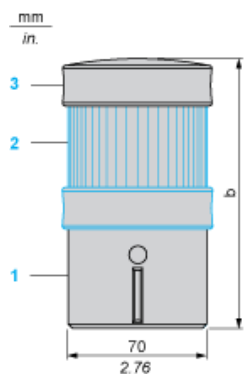

- (1) Base unit
- (2) Illuminated or audible signalling unit XVBC•••, to be ordered separately
- (3) Cover (supplied with base unit)


Number of illuminated or audible signalling units (no “flash”)	b in mm	b in in.
1	138	5.43
2	201	7.91
3	264	10.39
4	327	12.87
5	390	15.35

---

## Base Unit for Indicator Banks

---

### Panel Cut-out for Direct Fixing



---

## Illuminated Beacon

---

### Wiring Diagram

